

EUD12D-UC

Universal dimmer switch. Power MOSFET up to 400 W. Automatic lamp detection. Standby loss 0.3 watt only. With adjustable minimum brightness, maximum brightness and dimming speed. With switching operation for children's rooms and snooze function.

Modular device for DIN EN 60715 TH35 rail mounting. 1 module = 18 mm wide, 58 mm deep.
Universal dimmer switch for lamps up to 400 W, depending on ventilation conditions, dimmable 230 V LED lamps and dimmable energy saving lamps (ESL) are also dependent on the lamp electronics and the dimming technology, **see Technical data page 9-22.**
Up to 3600 W with capacity enhancers LUD12-230V (description page 9-10) at the terminals X1 and X2. Universal control voltage 12 to 230 V UC and additionally the universal voltage control inputs 8 to 230 V UC central ON and central OFF. The control inputs are electrically isolated from the supply voltage and switching voltage. **Zero passage switching with soft start and soft OFF to protect lamps.** In case of a power failure the switching position and the brightness level are stored. If applicable the dimmer will be switched on at the stored brightness level after the supply voltage is recovered. From 110 V control voltage glow lamp current up to 5 mA (not for DSD). Automatic electronic overload protection and over-temperature switch-off. The functions and times are entered using the MODE and SET keys as described in the operating manual and indicated on the LC display. A keylock function is provided.
You can dim all lamp types in automatic mode settings EUD, DSD, Udo, STS, MIN, MMX, CG **and** R.
EUD = Universal dimmer switch with settings for dimming speed, minimum brightness, maximum brightness, memory and Soft ON/OFF as well as choice of priority for central control. ESL and LED is settable. Short-time control commands switch on/off, permanent control varies the brightness to the maximum level. A interruption of control changes the direction of dimming.
LED is a convenience setting for dimmable 230 V LED lamps which cannot be dimmed down far enough in automatic mode (phase cut-off) for design reasons and must therefore be forced to phase control. There is a choice of 3 dimming curves.
ESL is a convenience setting for energy saving lamps which must be switched on at high voltage for design reasons so that they can also be switched back on cold in dimmed state. Memory must be switched off on energy saving lamps which cannot be switched back on in dimmed state for design reasons.
No inductive (wound) transformers may be used in ESL and LED settings. In addition the maximum number of lamps may be lower than in automatic mode for design reasons.
Switching operation for children's rooms: If the light is switched on by holding down the pushbutton, it starts at the lowest brightness level after approx. 1 second and dims up slowly as long as the push-button is held down without modifying the last stored brightness level.
Snooze function: With a double impulse the lighting is dimmed down from the current dimming position to the minimum brightness level and switched off. The current dimming position as well as the adjustable minimum brightness level determine the dimming time (max. = 60 minutes) which can be reduced as required. It can be switched off at any time by short-time control commands during the lighting is dimmed down. Holding down the pushbutton during the dimming down process dims up and stops the snooze function.
DSD = Same as universal dimmer switch EUD but also comprising activation via two direction switches on the universal voltage control inputs 12..230 V UC.
Udo = Same as universal dimmer switch EUD but also comprising setting for a time delay from 1 to 99 minutes. Switch-off early warning at the end by dimming is selectable and adjustable from 1 to 3 minutes.
STS = Staircase time switch with switchable switch-off early warning by dimming. With pump and permanent light by pushbutton. Time adjustable from 1 to 99 minutes. Switch-off early warning (no flickering) by dimming is adjustable from 1 to 3 minutes. Also for dimmable energy saving lamps ESL and 230 V LED lamps. **MIN** = Universal dimmer switch, switches when control voltage is applied to the minimum brightness setting. Maximum brightness is dimmed during the set dim time from 1 to 99 minutes. When the control voltage is interrupted, the device is switched off immediately, even during the dim time.
MMX = Same function as for **MIN;** when the control voltage is interrupted, dimming still continues until the set minimum brightness is reached. Then the device is switched off. **CG** = Clock with adjustable switch on/off times from 0.1 to 9.9 seconds. The maximum brightness is adjustable from 3 to 99%.
R = Switching relay with setting for Soft ON/OFF from 0.1 to 9.9 seconds. The maximum brightness is adjustable from 3 to 99%. **ON** = permanent ON. **OFF** = permanent OFF.
The dim position in % or the time lapse in minutes is indicated in the middle of the display. The expired, resettable switch-on time is indicated at the bottom of the display. Display menu guidance including language selection (German, English, French, Italian or Spanish) is described in the supplied operating instructions.

Typical connections

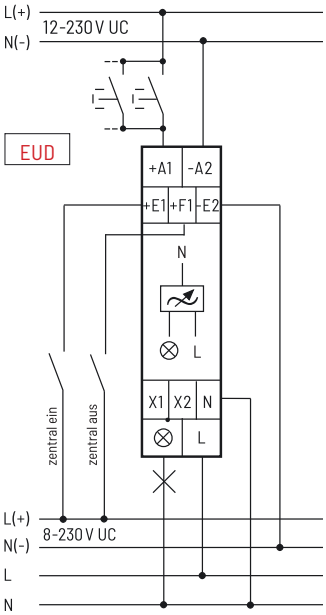

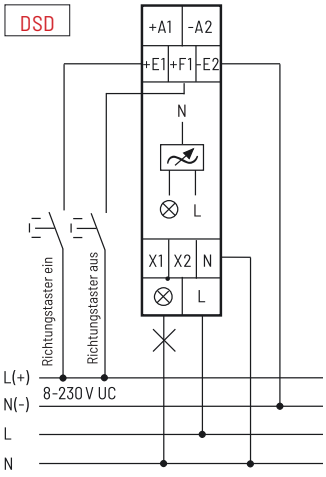

Manuals and documents in further languages:
https://eltako.com/redirect/EUD12D-UC

Technical data page 9-22.
Housing for operating instructions GBA14 page 1-48 chapter 1.

EUD12D-UC	Multifunction universal dimmer switch, Power MOSFET up to 400 W	**Art. No. 21100905**	

Recommended retail prices excluding VAT.

UNIVERSAL DIMMER SWITCHES, CAPACITY ENHANCERS AND 1-10 V CONTROLLERS

Type	EUD12NPN[1)] EUD12D[1)] EUD12DK[1)] LUD12[1)] MFZ12PMD[1)]	EUD61NPN[1)] EUD61M[1)] EUD61NP[1)] EUD61NPL[1)]	EUD12F[1)]	EUD12NPN-BT[1)]
Spacing of control connections/load	6 mm	6 mm EUD61NP: 3 mm	6 mm	6 mm
Incandescent and halogen lamps 230 V (R)	up to 400 W EUD12DK: up to 800 W	up to 400 W EUD61NPL: 200 W	up to 300 W	EUD12NPN-BT/300W-230V: 300W EUD12NPN-BT/600W-230V: 600W
Inductive transformers (L)[2)3)]	up to 400 W EUD12DK: up to 800 W	up to 400 W (not EUD61NPL)	up to 300 W	EUD12NPN-BT/300W-230V: 300W EUD12NPN-BT/600W-230V: 600W
Motor (L)	–	–	–	–
Capacative transformers (C)[3)8)]	up to 400 W EUD12DK: up to 800 W	up to 400 W EUD61NPL: 200 W	up to 300 W	EUD12NPN-BT/300W-230V: 300W EUD12NPN-BT/600W-230V: 600W
Dimmable 230 V LED lamps[5)6)9)]	Trailing edge up to 400 W Leading edge up to 100 W EUD12DK: Trailing edge up to 800 W Leading edge up to 200 W	Trailing edge up to 400 W, NPL: 200 W Leading edge up to 100 W, NPL: 40 W (not EUD61NP)	up to 300 W	EUD12NPN-BT/300W-230V: 300W EUD12NPN-BT/600W-230V: 600W
Dimmable LED lamps 12-36 V DC	–	–	–	–
1-10 V EVG	–	–	–	–
Maximum conductor cross-section (3-fold terminal)	6 mm² (4 mm²)	4 mm²	6 mm² (4 mm²)	6 mm²
Two conductors of same crosssection (3-fold terminal)	2.5 mm² (1.5 mm²)	1.5 mm²	2.5 mm² (1.5 mm²)	2.5 mm²
Screw head	slotted/crosshead, pozidriv	slotted/crosshead	slotted/crosshead, pozidriv	slotted/crosshead, pozidriv
Type of enclosure/terminals	IP50/IP20	IP30/IP20	IP50/IP20	IP50/IP20
Time on	100%	100%	100%	100%
Max./min. temperature at mounting location [4)]	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C
Standby loss (active power)	0.2 W LUD12: 0.1 W EUD12D und MFZ12PMD: 0.3 W	0.2 W EUD61M: 0.1 W EUD61NPL, EUD61NP: 0.5 W	0.5 W	0.3 W
Control voltage	12..230 V UC EUD12NPN/110-240V: 110-240 V AC	8..230 V UC EUD61NPN-230 V und EUD61NP: 230 V	internal DC voltage	230 V
Glow lamp current	5mA EUD12DK: - EUD12NPN/110-240V: -	-	-	-
Control current 230 V-control input (<5 s)	–	EUD61NP: 0.7 mA EUD61NPN-230V: 4(100) mA	-	2.2 mA
Control current universal control voltage all control voltages (<5 s) 8/12/24/230 V (<5 s)	10(100) mA –	– 2/3/7/4(100) mA	– –	-
Control current central 8/12/24/230 V (<5 s)	3/5/10/4(100) mA	–	–	-/-/-/2(100) mA
Max. parallel capacitance (approx. length) of single control lead at 230 V AC	0.9 µF (3000 m)	0.9 µF (3000 m) EUD61NP: 0.3 µF (1000 m)	-	0.3 µF (1000m)
Max. parallel capacitance (approx. length) of central control lead at 230 V AC	0.9 µF (3000 m)	–	-	0.3 µF (1000m)

* EVG = electronic ballast units; KVG = conventional ballast units [a)] Secondary cable length with a maximum of 2 m. [1)] For loads exceeding half the respective rated load, a ventilation distance of ½ module must be maintained from adjacent devices. For the EUD61, the switching capacity also depends on the ventilation conditions. [2)] Per dimmer or capacity enhancer it is only allowed to use max. 2 inductive (wound) transformers of the same type, **furthermore no-load operation on the secondary part is not permitted. The dimmer might be destroyed.** Therefore do not permit load breaking on the secondary part. Operation in parallel of inductive (wound) and capacative (electronic) transformers is not permitted! **[3)] When calculating the load a loss of 20% for inductive (wound) transformers and a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.** [4)] Affects the max. switching capacity. [5)] In the settings LED and ESL no wound (inductive) transformer must be dimmed. [6)] Increase of capacity for dimmable 230 V LED lamps and dimmable energy saving lamps ESL see page 9-10. [7)] Only 1 fan motor may be connected. [8)] For LED and 12 V halogen lamps. [9)] Usually applies to 230 V LED lamps. Different lamp electronics may result in restricted dimming areas, on/off problems and a limited maximum number of lamps (up to 10 units), especially if the connected load is very low (e.g. with 5 W LEDs). The comfort positions of the dimmer switches optimize the dimming range, which, however, only gives a maximum power up to 100 W. No inductive (wound) transformers may be dimmed in these comfort positions.

Compliance with: EN 61000-6-3, EN 61000-6-1 and EN 60 669

UNIVERSAL DIMMER SWITCHES, CAPACITY ENHANCERS AND 1-10 V CONTROLLERS

Type	ELD61[a)]	SDS12 SUD12	SDS61	MOD12D
Spacing of control connections/load	6 mm	6 mm	3 mm	6 mm
Incandescent and halogen lamps 230 V (R)	–	–	–	–
Inductive transformers (L)[2)3)]	–	–	–	–
Motor (L)	–	–	–	up to 300 W [7)]
Capacative transformers (C)[3)8)]	–	–	–	–
Dimmable 230 V LED lamps[5)6)9)]	–	–	–	–
Dimmable LED lamps 12-36 V DC	ELD61: 7,5 A	–	–	–
1-10 V EVG	–	40 mA 600 VA	40 mA 600 VA	–
Maximum conductor cross-section (3-fold terminal)	4 mm^2	6 mm^2 (4 mm^2)	4 mm^2	6 mm^2 (4 mm^2)
Two conductors of same crosssection (3-fold terminal)	1,5 mm^2	2.5 mm^2 (1.5 mm^2)	1.5 mm^2	2.5 mm^2 (1.5 mm^2)
Screw head	slotted/crosshead	slotted/crosshead, pozidriv	slotted/crosshead	slotted/crosshead, pozidriv
Type of enclosure/terminals	IP30/IP20	IP50/IP20	IP30/IP20	IP50/IP20
Time on	100%	100%	100%	100%
Max./min. temperature at mounting location [4)]	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C	+50°C/-20°C
Standby loss (active power)	0.1 W	0.5 W	0.5 W	0.3 W
Control voltage	12..230 V UC	8..230 V UC	230 V	12..230 V UC
Glow lamp current	–	–	–	–
Control current 230 V-control input (<5 s)	–	–	0.5 mA	–
Control current universal control voltage all control voltages (<5 s) 8/12/24/230 V (<5 s)	– 2/3/7/4(100) mA	– 3/5/10/4(100)mA	– –	2/3/8/5(100)mA –
Control current central 8/12/24/230 V (<5 s)	–	3/5/10/4(100)mA	–	2/3/8/5(100)mA
Max. parallel capacitance (approx. length) of single control lead at 230 V AC	0.3 µF (1000m)	0.3 µF (1000 m)	0.06 µF (200 m)	0.9 µF (3000 m)
Max. parallel capacitance (approx. length) of central control lead at 230 V AC	–	0.3 µF (1000 m)	–	0.9 µF (3000 m)

* EVG = electronic ballast units; KVG = conventional ballast units [a)] Secondary cable length with a maximum of 2 m. [1)] For loads exceeding half the respective rated load, a ventilation distance of ½ module must be maintained from adjacent devices. For the EUD61, the switching capacity also depends on the ventilation conditions. [2)] Per dimmer or capacity enhancer it is only allowed to use max. 2 inductive (wound) transformers of the same type, **furthermore no-load operation on the secondary part is not permitted. The dimmer might be destroyed.** Therefore do not permit load breaking on the secondary part. Operation in parallel of inductive (wound) and capacative (electronic) transformers is not permitted! **[3)] When calculating the load a loss of 20% for inductive (wound) transformers and a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.** [4)] Affects the max. switching capacity. [5)] In the settings LED and ESL no wound (inductive) transformer must be dimmed. [6)] Increase of capacity for dimmable 230 V LED lamps and dimmable energy saving lamps ESL see page 9-10. [7)] Only 1 fan motor may be connected. [8)] For LED and 12 V halogen lamps. [9)] Usually applies to 230 V LED lamps. Different lamp electronics may result in restricted dimming areas, on/off problems and a limited maximum number of lamps (up to 10 units), especially if the connected load is very low (e.g. with 5 W LEDs). The comfort positions of the dimmer switches optimize the dimming range, which, however, only gives a maximum power up to 100 W. No inductive (wound) transformers may be dimmed in these comfort positions.

According to DIN VDE 0100-443 and DIN VDE 0100-534, the installation of a surge arrester (SPD) is mandatory.
ELTAKO offers suitable, standard-compliant surge arresters of types 1, 2, and 3 – see Chapter 8, "Surge Arresters."

Compliance with: EN 61000-6-3, EN 61000-6-1 and EN 60 669