Product Information

SRS server cabinet, BKT 42U, 800/1200/1980 (W/D/H [mm]), single leaf perforated front door, shortened perforated rear wall, RAL 9005 BLACK (welded frame - capacity 1000 kg)

Card Number: PI_SSRS4280123511.3_01.24





* sample photo

Standards

PN-EN 60297-3-100:2009-02, IEC 60297-100-3:2008-11, RoHS 2011/65/EU

Application

Server rooms, distribution points and telecommunications nodes in industry, public institutions or public buildings.

Features

- Stable welded frame,
- Three point lock secured with a key code 1333 as standard,
- Two pairs of mounting profiles as standard,
- Additional horizontal traverses ensuring rigidity,
- The ability to change the direction of door opening to the right/left,
- Dismantled side walls secured with a key code 1333 as standard,
- All disconnectable elements have earthing lines,
- Dedicated place for the installation of the BKT earthing strip,
- The possibility of setting and screwing cabinets into rows,
- 6 cable slots to break out in the roof and floor (4x 2U and 2x 4U),
- Starter kit included as standard (16x screws M6 with washers and nuts, 1x cable grommet, 1.5 m edge protection),
- 4 leveling feet for the cabinet in the range of 20 mm as standard,
- Mounting profiles with permanent numbering of the U mounting height as standard,
- The possibility of moving the mounting profiles front/rear every 25 mm,
- Door opening angle above 180°,
- Painting in powder technique ensuring durability of the product.

The specification is owned and copyrighted by BKT Elektronik Sp. z o.o. Information contained herein may be changed at owner's discretion without any notice. BKT Elektronik may not be held liable for any possible inaccuracies and discrepancies in this document.

Product Information

SRS server cabinet, BKT 42U, 800/1200/1980 (W/D/H [mm]), single leaf perforated front door, shortened perforated rear wall, RAL 9005 BLACK (welded frame - capacity 1000 kg)

Card Number: PI_SSRS4280123511.3_01.24

Product characteristics

- Construction: welded
- Material: steel sheet
- Front door: single leaf perforated metal
- Rear wall: shortened perforated metal panel
- Side walls: sheet metal
- Load capacity: 1000 kg
- IP rating: 20
- Weight: 130 kg
- Color: RAL 9005

Performance / Variants

Type	Width [mm]	Depth [mm]	Height [mm]	Index
42U	800	1200	1980	SSRS4280123511.3

Optional accessories

Index	Name
11070812.3	BKT plinth/base 100 mm, for cabinet width 800 and depth 1200 mm - RAL 9005 BLACK
11126420.3	BKT vertical cable management panel/organiser BKT 42U RAL 9005 BLACK
24011430.TLC	BKT ventilation panel 4x fan, roof/rack mounted + thermostat 1U RAL 9005 BLACK
11111125.3	BKT fixed shelf 19", 1U, depth 250 mm, mounted on the front RAL 9005 BLACK
11111165.3V	BKT fixed shelf 19", 1U, depth 650 mm, mounted at 4 points RAL 9005 BLACK
11140775	BKT filtration panel, roof/rack mounted (1 filter/insert included), 8U
11140592.3	BKT metal cable organiser 19" - with metal ears RAL 9005 BLACK 1U
11140101.3	BKT cable organiser 19" - high elasticity RAL 9005 BLACK 1U
11140932	BKT horizontal cable organiser 19" - metal, plastic ears RAL 9005 BLACK 1U
11140851	Cable grommet/cable entry with brush for standing BKT cabinets (1 pc.) 90/450 mm
11090015	M6 cage nut & rack screw set (20x screws M6 + washers + floating nuts)
11190130	Line-up bolts set BKT SRS (cabinet joining kit)
11140501.3	BKT blanking panel 1U RAL 9005 BLACK
11140502.3	BKT blanking panel 2U RAL 9005 BLACK
11160032	BKT earthing kit



The specification is owned and copyrighted by BKT Elektronik Sp. z o.o. Information contained herein may be changed at owner's discretion without any notice. BKT Elektronik may not be held liable for any possible inaccuracies and discrepancies in this document.

Product Information

SRS server cabinet, BKT 42U, 800/1200/1980 (W/D/H [mm]), single leaf perforated front door, shortened perforated rear wall, RAL 9005 BLACK (welded frame - capacity 1000 kg)

Card Number: PI_SSRS4280123511.3_01.24

Construction

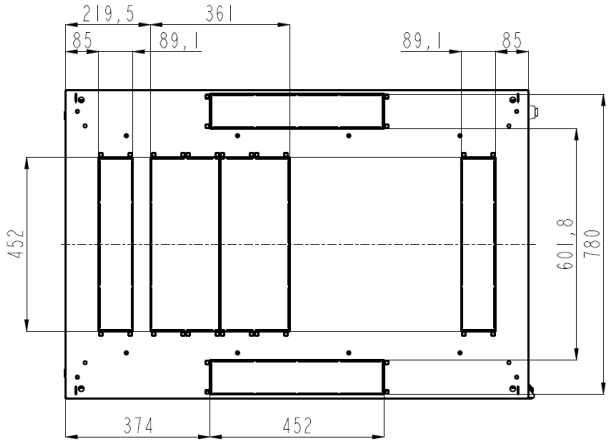

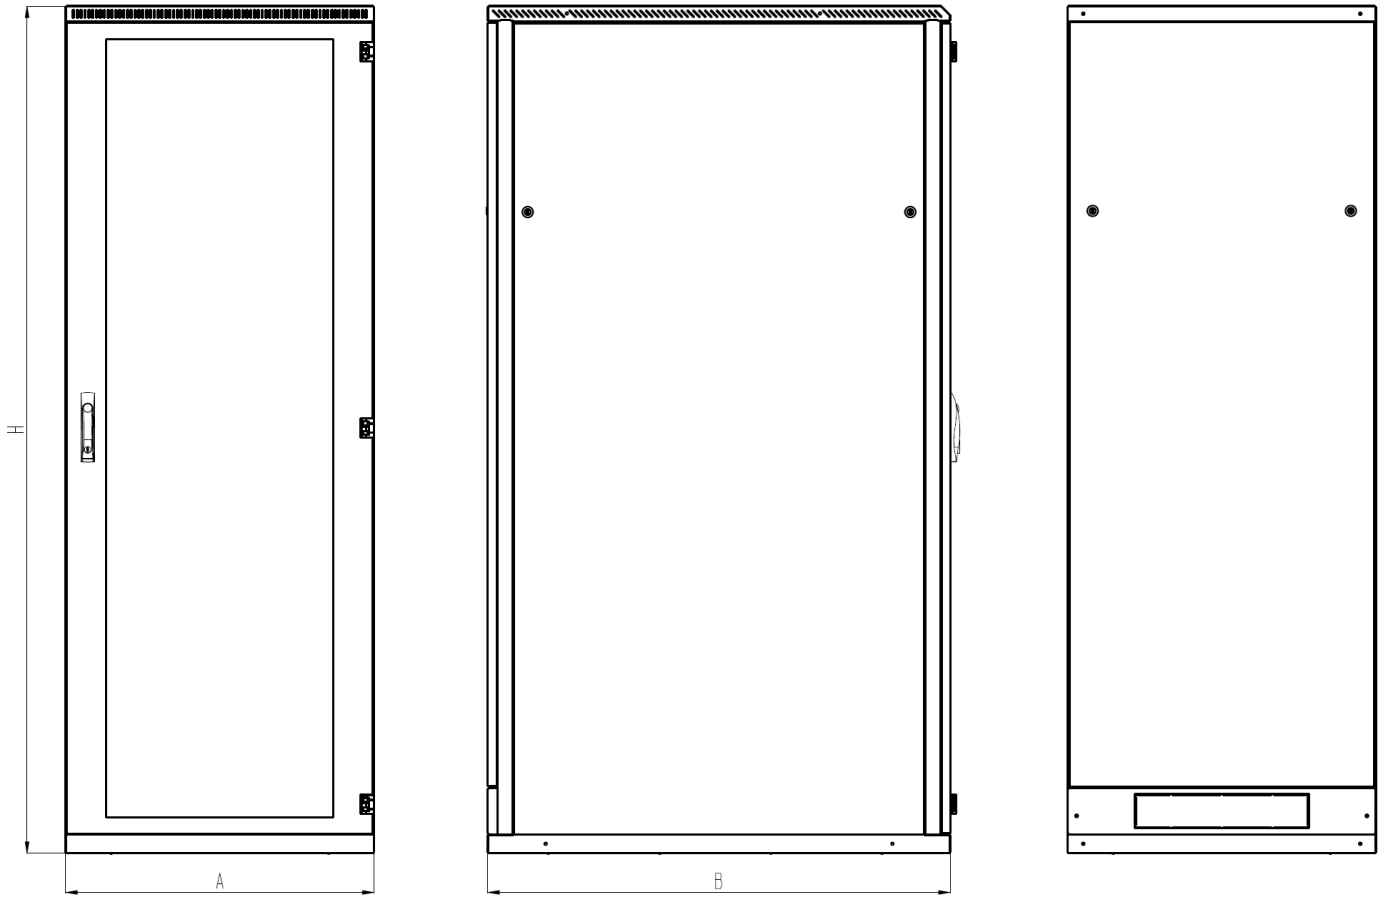

Measurement A [mm] Width	Measurement B [mm] Depth	Measurement C [mm] Height
800	1200	1980

The specification is owned and copyrighted by BKT Elektronik Sp. z o.o. Information contained herein may be changed at owner's discretion without any notice. BKT Elektronik may not be held liable for any possible inaccuracies and discrepancies in this document.