


K 290 W reel



K 290 W - K 290 W3

### Technical specifications. 6,8 mm coaxial cable K 290 W

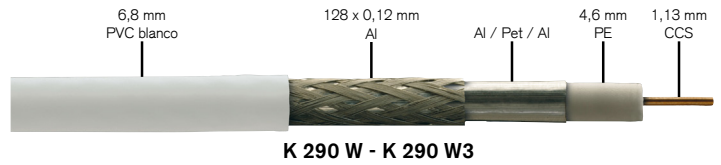

	K 290 W	K 290 W3
<b>Code</b>	0703408	0703410
<b>Inner conductor (mm) Ø</b>	1,13 CCS	1,13 CCS
<b>Dielectric (mm) Ø</b>	4,6 PE	4,6 PE
<b>Foil material</b>	Al / Pet / Al	Al / Pet / Al
<b>Braiding material</b>	Al	Al
<b>Number of wires (braiding)</b>	128	128
<b>Braiding composition</b>	16 x 8 x 0,12 mm	16 x 8 x 0,12 mm
<b>Outer jacket (mm) Ø</b>	6,8 PVC white	6,8 PVC white
<b>Screening factor (30 - 900 MHz)</b>	> 90 dB	> 90 dB
<b>Nominal attenuation (dB / 100 m)</b>		
<b>47 MHz</b>	3,7	3,7
<b>175 MHz</b>	6,7	6,7
<b>470 MHz</b>	11,2	11,2
<b>862 MHz</b>	16,2	16,2
<b>950 MHz</b>	17,5	17,5
<b>1350 MHz</b>	21,8	21,8
<b>1750 MHz</b>	25,0	25,0
<b>2150 MHz</b>	28,2	28,2
<b>Lenght (m)</b>	100	300
<b>Impedance (Ω)</b>	75	75
<b>Net weight (Kg)</b>	4,17	12,6
<b>Presentation</b>	100 m cardboard spool	300 m wooden drum
<b>Reaction to fire</b>	Fca	Fca
<b>No. Declaration of Performance (DoP)</b>	DOP-0703408	DOP-0703410
<b>EAN Code 13</b>	8436023599177	8436023599184
<b>Packaging quantity</b>	1 / 4	1

