Accessories



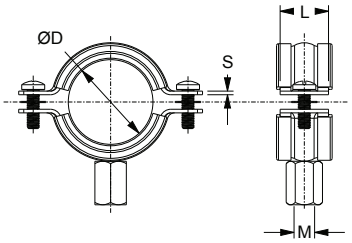

Technical characteristics

Electro galvanized stainless steel
"EPDM rubber insulation ("G" series)"
"Vibration reduction as per DIN 4109 18 db ("G" series)"
Unloosable tightening screws thanks to special plastic washers
"Operation temperature: -40/+110° ("G" series)"
Suitable for both vertical and horizontal assembly
M8/M10/M12 combi nuts
Breaking load: 6000N

PCL - Ω PIPE "G" - EPDM INSULATED PIPE CLAMPS

Code	Reference		F	Ø"	Ø (mm)	M	L x S (mm)
PCL1000	PCL-G-3/8	100	E	3/8"	16 - 20	M8 / M10	20 x 1,5
PCL1005	PCL-G-1/2	100	E	1/2"	20 - 24	M8 / M10	20 x 1,5
PCL1010	PCL-G-3/4	100	E	3/4"	25 - 28	M8 / M10	20 x 1,5
PCL1015	PCL-G-1	100	E	1"	32 - 35	M8 / M10	20 x 1,5
PCL1020	PCL-G-1-1/4	50	E	1-1/4"	39 - 46	M8 / M10	20 x 1,5
PCL1025	PCL-G-1-1/2	50	E	1-1/2"	48 - 53	M8 / M10	20 x 1,5
PCL1030	PCL-G-2	25	E	2"	59 - 66	M8 / M10	20 x 1,5
PCL1035	PCL-G-2-1/2	25	E	2-1/2"	74 - 80	M8 / M10	25 x 2
PCL1040	PCL-G-3	25	E	3"	87 - 94	M10 / M12	25 x 2
PCL1045	PCL-G-4	12	E	4"	108 - 116	M10 / M12	30 x 3
PCL1050	PCL-G-5	6	E	5"	135 - 143	M10 / M12	40 x 4

Clamps and collars







FM APPROVED c UL us LISTED VdS

TKM - MORSETTI IN GHISA PER FISSAGGIO A TRAVE

Code	Reference		F	H (mm)	M / Ø	CM (kg)
TKM1000	TKM- M6	50	G	18	M6	120
TKM1005	TKM 8	50	G	18	Ø 9	120
TKM1010	TKM-M8	50	G	18	M8	120
TKM1015	TKM10	50	G	20	Ø 11	250
TKM1020	TKM-M10	50	G	20	M10	250
TKM1025	TKM12	50	G	26	Ø 13	350
TKM1030	TKM-M12	50	G	26	M12	350
TKM1035	TKM-M16	50	G	28	M16	550