SCHUKO® socket with LED floor pilot light, 16 A 250 V ~, Safety Plus, thermoplastic, AS/A range, white




Reference number:	A 1520-O WW LNW
EAN/GTIN:	4011377154919
Color:	white
Material:	thermoplastic

Individual colour printing possible

Thermoplastic (breakproof) high-gloss
with LED floor pilot light
with integrated brightness sensor
with enhanced contact protection / shutter (Safety Plus)
with screwless terminals for rigid wires up to 2.5 mm²

installation into deep flush box
with white LEDs (colour temperature 3500 K)
power consumption stand-by / ON: 0.3 / 0.5 W
Supporting frame, claws and claw screws are integrated into the earth protection.


Dimensions

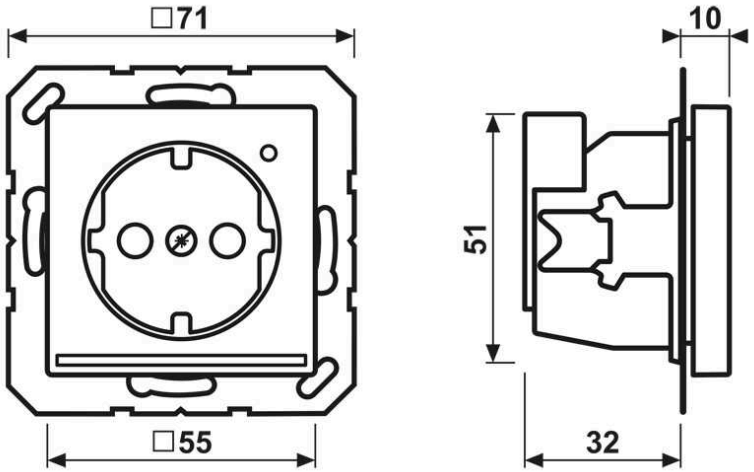

ALBRECHT JUNG GMBH & CO. KG
Volmestraße 1
58579 Schalksmühle

Phone +49 (0) 23 55/80 60
E-Mail kundencenter@jung.de

Assembly

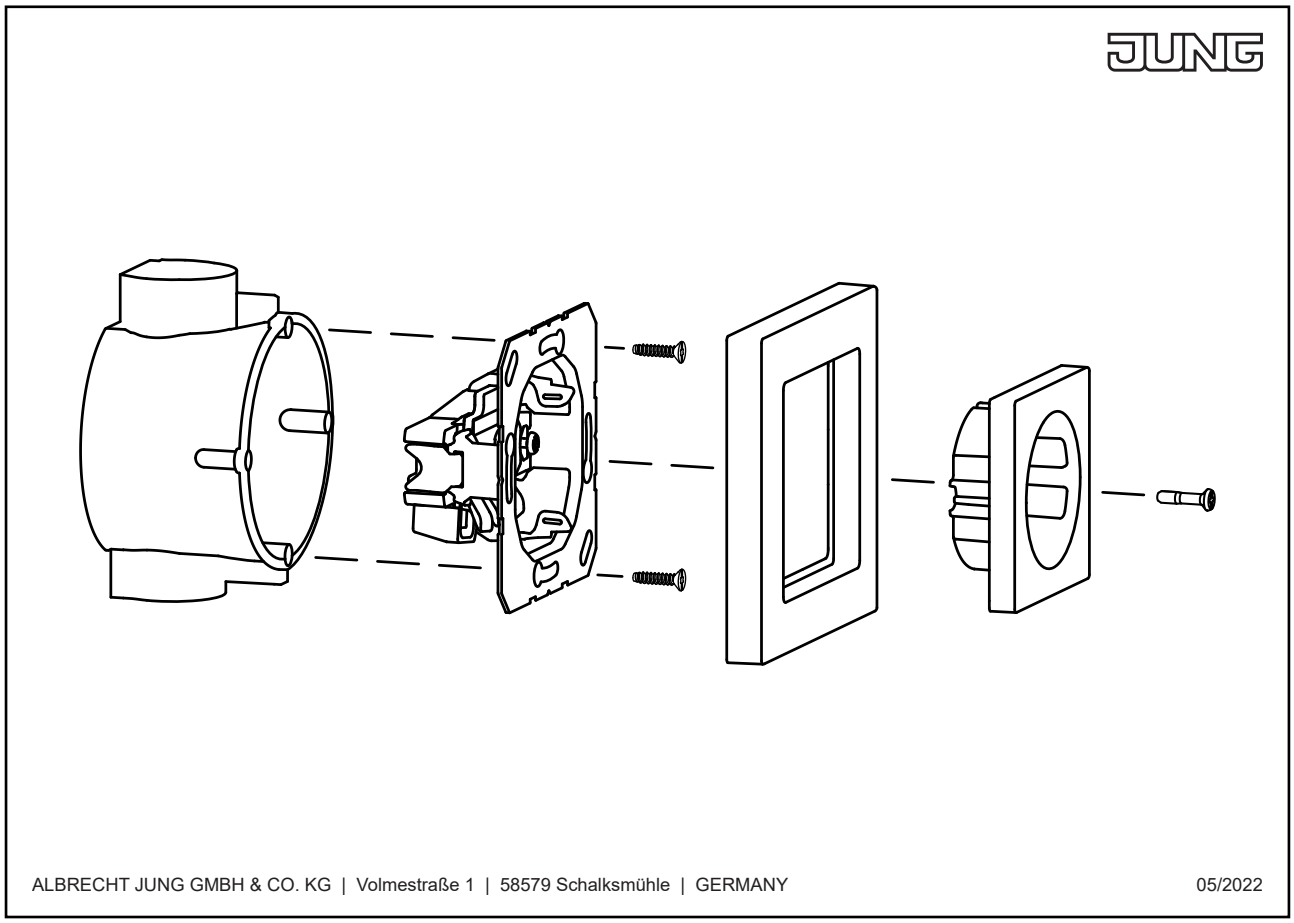

Notice!
Installation only by persons with relevant electrical knowledge and experience!*)
Use only with original JUNG product components approved for this article.
By inappropriate installation you endanger
• your own life,
• the life of the user of the electrical appliance.
By inappropriate installation you risk a high loss by damage, e.g. risk by fire.
You assume personal liability in cause of injury to persons or damage of appliances.
Please contact a skilled electrician!

***) Required technical knowledge for installation:**
For installation, especially the following technical knowledge is required:
• the 5 important safety rules: disconnect from mains, secure against reconnecting, verify parts are free of voltage, ground and short-circuit, cover or block off adjacent live parts
• select adequate tools, measuring devices and personal protective equipment
• evaluate measuring results
• selection of the electrical installation material to secure switch-off conditions
• IP protection levels
• installation of the electrical installation material
• type of electric power grid (TN system, IT system, TT system) and the resultant connection terms (common grounding, protective ground, required additional action etc.)