

## SCHUKO® socket, 16 A 250 V ~, with USB charger, 1 x type A + 1 x type C, Safety Plus, AS/A range, white



<b>Reference number:</b>	A 1520-15 CA WW
<b>EAN/GTIN:</b>	4011377184329
<b>Color:</b>	white
<b>Material:</b>	thermoplastic

- Individual colour printing possible
- Individual laser engraving possible



### Thermoplastic (breakproof) high-gloss with enhanced contact protection / shutter (Safety Plus)

with 1 USB port type A and 1 USB port type C

with screwless terminals for rigid and untreated flexible wires up to 2.5 mm<sup>2</sup>

Installation in flush box with dimensions according to DIN 49073

depth of flush box (inner dimension): min. 57 mm

#### Accessories:

#### Accessories:


Frame 28 mm structure height ref.-no.: A 558.. HBF ..

Cradle to Cradle certified


## Technical data

<b>Rated voltage:</b>	AC 220 ... 250 V ~
<b>Mains frequency:</b>	50/60 Hz
<b>Rated current:</b>	16 A
<b>Output voltage USB:</b>	DC 5 V
<b>Output current USB (total):</b>	3 A
<b>Stand-by power:</b>	≤ 25 mW
<b>Ambient temperature:</b>	+5 ... +35 °C
<b>Storage/transport temperature:</b>	-20 ... +70 °C
<b>Connection mode:</b>	screwless terminals

Dimensions

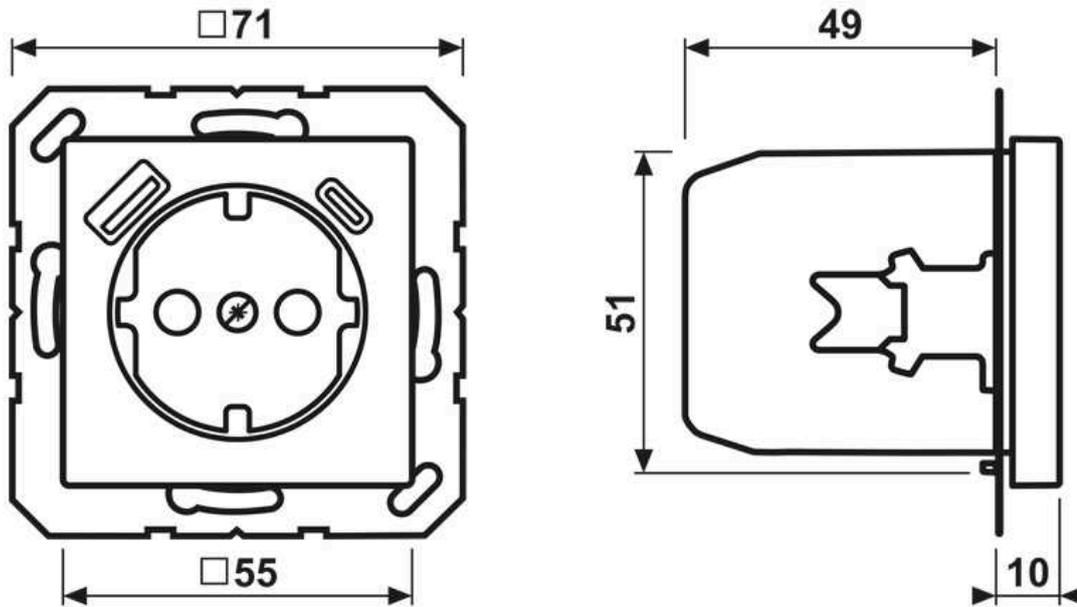

Assembly

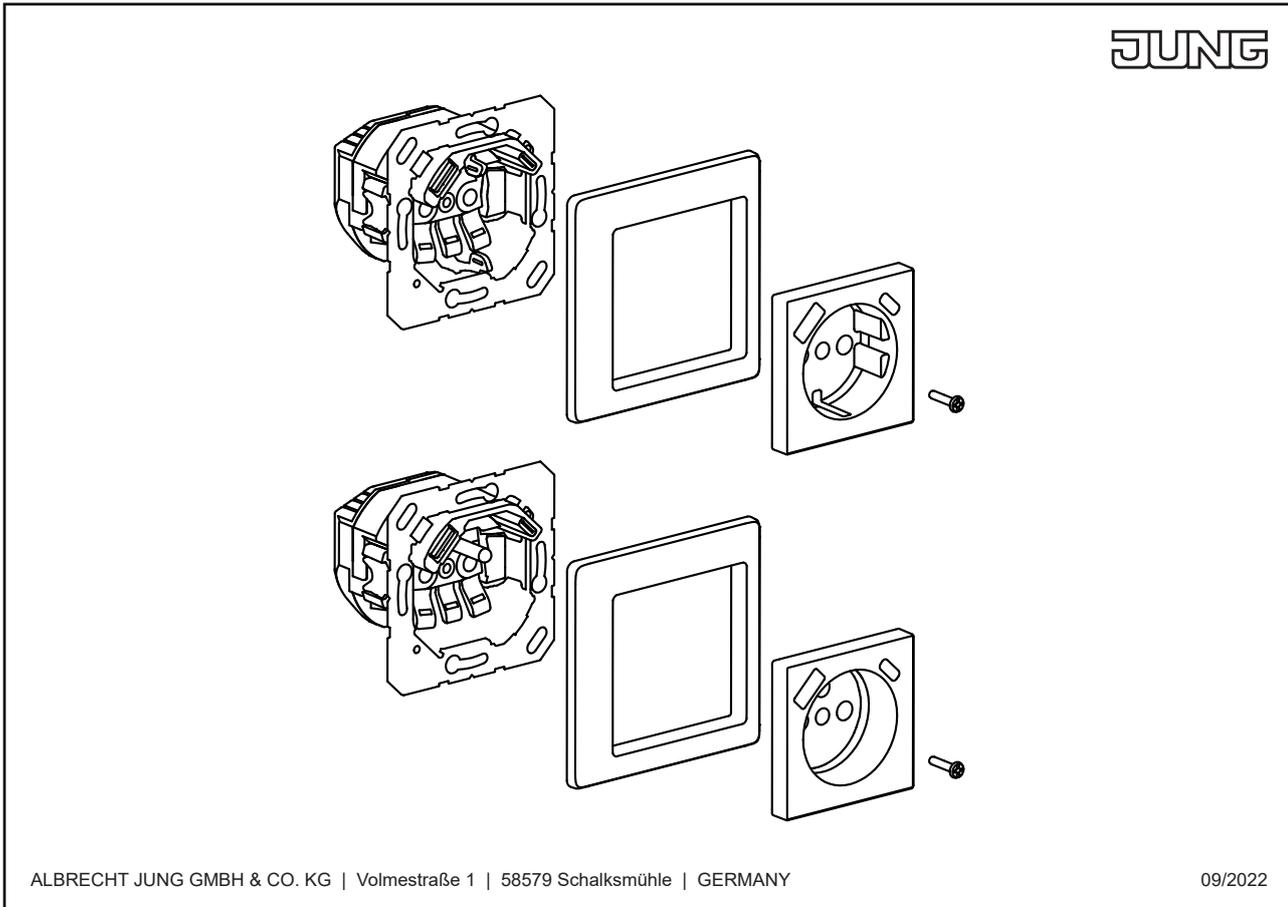

ALBRECHT JUNG GMBH & CO. KG | Volmestraße 1 | 58579 Schalksmühle | GERMANY

09/2022