zencontrol

Three scene Scenepanel **datasheet**

V 2.0
Last updated 08 / 12 / 20
Information is subject to change without notice, E&OE



Features

- Up to 10 units per DALI line
- Automatic configuration of scene recall
- Models to suit 60 and 84 mm mounting centres
- Multiple faceplate finishes and colours available
- Customised control on DALI application controller
- Single button dimmer provides manual adjustments
- Customisable labels available for specific applications

Powered by DALI
No additional supply means energy savings and simple installation

DALI-2
For use with DALI-2 compliant application controller

Integrated illumination
Configurable inbuilt LED status indicator for user convenience

Scene recall
Plug and play control of scenes

© zencontrol

zencontrol

Three scene Scenepanel **datasheet**



Product range

Order code	Description
zc-scene-3scn	Scenepanel to suit 60 mm wall mount assembled with hardware for three scenes
zc-scene-c-3scn	C-clip compatible scenepanel to suit 84 mm wall mount assembled with hardware for three scenes

Features

- Up to 10 units per DALI line
- Automatic configuration of scene recall
- Designed for compliance to IEC 62386-301*
- Models to suit 60 and 84 mm mounting centres
- Multiple faceplate finishes and colours available
- Customised control on DALI application controller
- For use with DALI-2 compliant application controller
- Single button dimmer provides manual adjustments

*** Pending publication of test sequences**

Dimensions

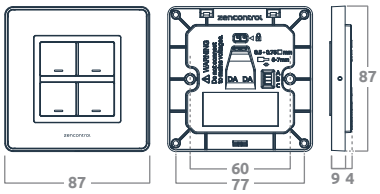

To suit 60 mm wall mount
Dimensions **87 / 87 / 13 mm**
Mounting centres **60 mm**

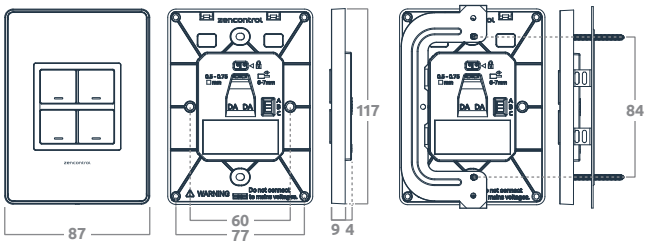

To suit 84 mm wall mount
Dimensions **87 / 117 / 13 mm**
Mounting centres **84 mm**

With c-clip

Specifications

Supply	DALI
Control system	DALI-2
DALI line current	15 mA
Wiring	0.5 - 0.75 mm^2 Strip 6 - 7 mm
Operating temperature	0 to 45°C
Material	PC UV stabilised, ABS, 316 stainless
Ingress protection	IP20
Compliance standards	IEC 61347-2-11 CISPR 15 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC

Notice

- The switch must not be connected to any mains.
  It is powered directly from the DALI line.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.
- Compatible with zencontrol control system with a firmware version of 00.08.10 or above

Configuration

- The Scenepanel presents on a DALI line as four control device instances.
- When used with zencontrol controllers the controller is automatically configured to send scenes 1 - 3 to the connected group.
- The power button is configured to act as a single button dimmer.
- Actual function is dependant on the configuration of DALI-2 application controllers connected to the DALI line.

V 2.0
Last updated **08 / 12 / 20**

Information is subject to change without notice, E&OE

© zencontrol