41ECL022

1-LOOP CARD FOR ADDRESSABLE CONTROL PANELS 41CPE112

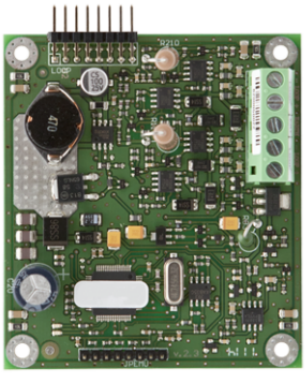

Maximum number of devices that can be connected: 250. Maximum current consumption: 500 mA. Cable cross section: 0.4 - 2.0 mm2. Operating temperature -10°C / +65 C. Operating relative humidity: (93 ± 3)% @ 40 °C. Dimensions: 75x80 mm. Weight: 30 g

41ECL022

1-LOOP CARD FOR ADDRESSABLE CONTROL PANELS 41CPE112

Max. number of devices per loop (n°)	250

HARDWARE SPECIFICATIONS	
Product weight (g)	30
Operating temperature (°C)	-10 ÷ 65
Cross-section for terminals (mm)	0.4 ÷ 2.5

ELECTRICAL SPECIFICATIONS	
Max. absorption of connected devices with charged battery (A)	0.5

The technical specifications are subject to change without prior notice.