41IOM022

# ADDRESSABLE MODULE WITH 2 INPUTS AND 2 OUTPUTS

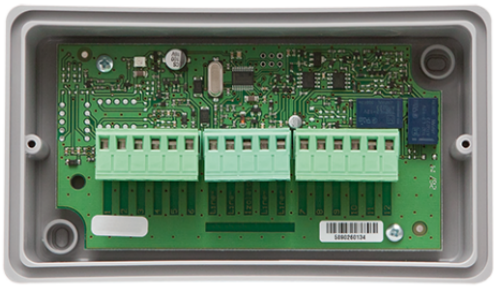

The 41IOM022 addressable module checks two balanced inputs and controls two relay outputs. It is powered from the loop and is controlled by the control panel by means of the communication protocol. The module comes in a plastic container which is suited to wall mounting; it has a transparent plastic cover for easy visual inspection. Approved to EN 54-17 and EN 54-18.

**41IOM022**

# ADDRESSABLE MODULE WITH 2 INPUTS AND 2 OUTPUTS

| MAIN FEATURES | |
|---|---|
| Isolator | Yes |
| EN regulations | EN54-17, EN54-18 |

| HARDWARE SPECIFICATIONS | |
|---|---|
| Height (mm) | 80 |
| Width (mm) | 142 |
| Depth (mm) | 45 |
| Type of finishing materials | ABS |
| Product color | Branco, cobertura transparente |
| Product weight (g) | 230 |
| Operating temperature (°C) | -10 ÷ 60 |
| Operating humidity (RH max @40°C) (%) | 0 ÷ 96 |
| Cross-section for terminals (mm) | 0.4 ÷ 2.5 |

| ELECTRICAL SPECIFICATIONS | |
|---|---|
| Supply voltage | 15÷32VDC |
| Absorption in stand-by (mA) | 0.24 |
| Rated absorption | 260uA@27VDC |
| Absorption with 1 LED ON (mA) | 3.5 |
| Output(s) maximum current | 1A@30VDC/0.5A@125VAC |
| Number of supervised inputs (n°) | 2 |
| Number of relay outputs (n°) | 2 |

| GENERAL DATA | |
|---|---|
| IP protection rating | IP21 |

The technical specifications are subject to change without prior notice.