# Specifications

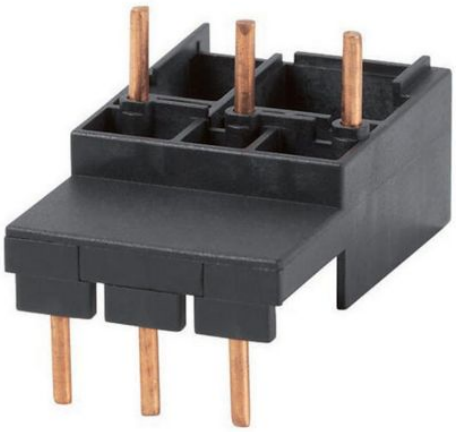

## Eaton 239349

Eaton Moeller® series PKZM0 Wiring module, for DILM17-M32

| General specifications | |
|---|---|
| **PRODUCT NAME** | Eaton Moeller® series PKZM0 Accessory Wiring module |
| **CATALOG NUMBER** | 239349 |
| **MODEL CODE** | PKZM0-XM32DE |
| **EAN** | 4015082393496 |
| **PRODUCT LENGTH/DEPTH** | 67 mm |
| **PRODUCT HEIGHT** | 41 mm |
| **PRODUCT WIDTH** | 36 mm |
| **PRODUCT WEIGHT** | 0.023 kg |
| **CERTIFICATIONS** | UL Category Control No.: NLRV<br>CSA-C22.2 No. 14<br>IEC/EN 60947-4-1<br>CSA File No.: 165628<br>UL<br>CE<br>CSA<br>UL File No.: E36332<br>CSA Class No.: 3211-05<br>UL 508 |

## Climatic environmental conditions

| | |
|---|---|
| **AMBIENT OPERATING TEMPERATURE - MAX** | 55 °C |
| **AMBIENT OPERATING TEMPERATURE - MIN** | -25 °C |

## Design verification

| | |
|---|---|
| **RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)** | 32 A |
| **STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS** | 0 W |
| **10.10 TEMPERATURE RISE** | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| **10.11 SHORT-CIRCUIT RATING** | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| **10.12 ELECTROMAGNETIC COMPATIBILITY** | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| **10.13 MECHANICAL FUNCTION** | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |
| **10.2.2 CORROSION RESISTANCE** | Meets the product standard's requirements. |
| **10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES** | Meets the product standard's requirements. |
| **10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT** | Meets the product standard's requirements. |
| **10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS** | Meets the product standard's requirements. |
| **10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION** | Meets the product standard's requirements. |
| **10.2.5 LIFTING** | Does not apply, since the entire switchgear needs to be evaluated. |
| **10.2.6 MECHANICAL IMPACT** | Does not apply, since the entire switchgear needs to be evaluated. |
| **10.2.7 INSCRIPTIONS** | Meets the product standard's requirements. |
| **10.3 DEGREE OF PROTECTION OF ASSEMBLIES** | Does not apply, since the entire switchgear needs to be evaluated. |
| **10.4 CLEARANCES AND CREEPAGE DISTANCES** | Meets the product standard's requirements. |
| **10.5 PROTECTION AGAINST ELECTRIC SHOCK** | Does not apply, since the entire switchgear needs to be evaluated. |
| **10.6 INCORPORATION OF** | Does not apply, since the |

| | |
|---|---|
| **SWITCHING DEVICES AND COMPONENTS** | entire switchgear needs to be evaluated. |
| **10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS** | Is the panel builder's responsibility. |
| **10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS** | Is the panel builder's responsibility. |
| **10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH** | Is the panel builder's responsibility. |
| **10.9.3 IMPULSE WITHSTAND VOLTAGE** | Is the panel builder's responsibility. |
| **10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL** | Is the panel builder's responsibility. |
| **EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID** | 1.5 W |
| **HEAT DISSIPATION CAPACITY PDISS** | 0 W |
| **HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID** | 0.5 W |

## Electrical rating

| | |
|---|---|
| **RATED OPERATIONAL CURRENT (IE)** | 32 A |
| **RATED OPERATIONAL VOLTAGE (UE) - MAX** | 415 VAC |

## General information

| | |
|---|---|
| **MODEL** | Direct circuit |
| **PRODUCT CATEGORY** | Accessories |

## Resources

| | |
|---|---|
| **BROCHURES** | eaton-motor-starters-system-xstart-brochure-br03407001en-en-us.pdf<br><br>eaton-push-in-technology-product-overview-brochure-br034012-en-us.pdf |
| **CATALOGUES** | eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf |
| **DECLARATIONS OF CONFORMITY** | eaton-accessory-declaration-of-conformity-eu250700en.pdf<br><br>eaton-accessory-declaration-of-conformity-uk251183en.pdf |
| **DRAWINGS** | eaton-manual-motor-starters-current-pkzm0-wiring-module-3d-drawing.eps |
| **ECAD MODEL** | ETN.239349.edz |
| **INSTALLATION INSTRUCTIONS** | IL03402007Z |
| **INSTALLATION VIDEOS** | WIN-WIN with push-in technology |
| **MCAD MODEL** | 0_xm32de.stp |
| **SALES NOTES** | eaton-link-module-for-motor-starters-pkz-flyer-fl034003en-en-us.pdf |

| | |
|---|---|
| **PROJECT NAME:** | |
| **PROJECT NUMBER:** | |
| **PREPARED BY:** | |
| **DATE:** | |

**Eaton Corporation plc** Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

Follow us on social media to get the latest product and support information.

© 2026 Eaton. All Rights Reserved.