MICRO/AR

7024AR3015GL





SPECIFIC PRODUCT

Mod	AR
Color	Matt grey
Installation	Indoor and outdoor led floodlight
Application	Indoor, Outdoor
Materials	Die-cast aluminum body painted with matt grey epoxy powders
Insulation class	Classe I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	Satin aluminum reflector, high flux efficiency 45° asymmetrical PMMA lenses. Extra-clear glass diffuser
Beam angle	45°
Power supply	220-240Vac
Frequency	50/60Hz
Led modules	Removable (Class: D)
Standard equipment	- 800 mm long H05RN-F 3x1 mm² neoprene cable. - Anti-condensation osmotic valve. - AC direct led board with phase cut dimming.
Luminous flux maintenance	L80-B50 > 75.000 h L80-B20 > 50.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
15	-	3000°K - CRI>80	on/off	1663	111	95	25	155	-	0.60

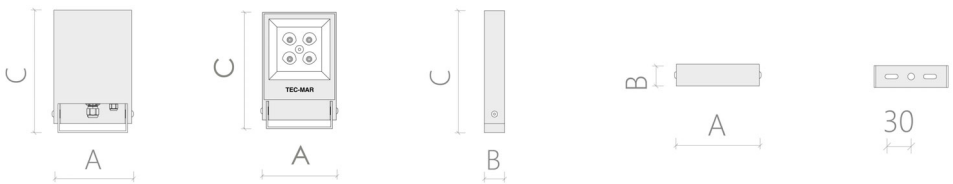

RELATED ACCESSORIES



ACC011
Ground installation picket for MICRO serie.



ACC076
Outreach wall bracket, silver color. Outreach length: 50 cm.



ACC077
Outreach wall bracket, silver color. Outreach length: 100 cm.



ACC241
Universal dimmer with 230Vac phase cut output.

TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.