MICRO 2 - Mod. AR

7025AR3030GL





SPECIFIC PRODUCT

Mod	AR
Color	Silver
Installation	Indoor and outdoor led floodlight, with floor, wall and ceiling mounting
Application	Indoor, Outdoor
Materials	Die cast aluminium body, painted with epoxypolyester powders, silver
Insulation class	Class I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	45° asymmetric beam matt satin aluminium reflector
Beam angle	45°
Power supply	220-240Vac
Frequency	50/60Hz
Led modules	Removable (Class: D)
Standard equipment	- 800mm long H05RN-F 3x1mm² neoprene cable. - Anti-condensation valve.
Windage	0,0147 m2
Luminous flux maintenance	L80-B50 > 75.000 h L80-B20 > 50.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	L (mm)	P (mm)	H (mm)	D (mm)	Kg
30	-	3000°K - CRI>80	on/off	3125	104	95	25	155	-	0.60

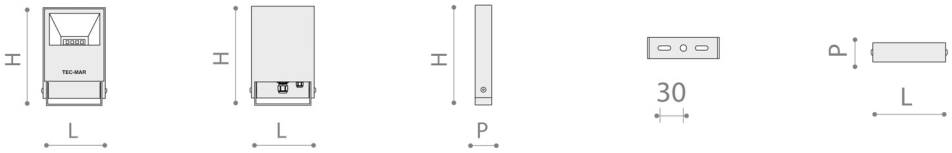

RELATED ACCESSORIES



ACC011
Ground installation picket for MICRO serie.



ACC076
Outreach wall bracket, silver color. Outreach length: 50 cm.



ACC077
Outreach wall bracket, silver color. Outreach length: 100 cm.



ACC241
Universal dimmer with 230Vac phase cut output.

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.