# POLAR 2/RR

**7027RR4090GL**






## SPECIFIC PRODUCT

| | |
|---|---|
| **Mod** | RR |
| **Color** | Silver |
| **Installation** | Indoor and outdoor led floodlight, with floor, wall, pole and ceiling mounting |
| **Application** | Indoor, Outdoor |
| **Materials** | Die cast aluminium body, coated with polyester anticorrosion powder, silver color. 4 mm thick tempered transparent glass, silicon gasket |
| **Insulation class** | Classe I |
| **Protection index** | IP66 |
| **Impact degree** | IK08 |
| **Ambient temperature (Ta)** | -25 / 45 °C |
| **Optics** | 65° asymmetric beam matt satin aluminium reflector |
| **Beam angle** | 65° |
| **Power supply** | 220-240Vac |
| **Frequency** | 50/60Hz |
| **Surge protection** | 10kv |
| **Led modules** | Removable (Class: D) |
| **Standard equipment** | - 1000 mm long H07RN-F 3x1mm² neoprene cable.<br>- Cable gland with integrated anticondensation valve. |
| **Windage** | 0,075 m2 |
| **Luminous flux maintenance** | L90-B10 > 100.000 h |
| **Wiring** | Removable |
| **Step Mac Adams** | 3 step |
| **Photobiological safety class** | Risk exempt group |
| **Trademarks and certifications** | CE / UNI EN 60598-1 |
| **Warranty** | 7 years |

## PRODUCT FEATURES

| W tot. | mA | °K - CRI | Options | Lumen OUTPUT | Lm/W | A (mm) | B (mm) | C (mm) | D (mm) | Kg |
|---|---|---|---|---|---|---|---|---|---|---|
| 90 | - | 4000°K - CRI>80 | on/off | 13602 | 151 | 205 | 50 | 365 | - | 3.7 |




## RELATED ACCESSORIES



**ACC069**
IP66 waterproof connector,e 2P + E (16A - 400V).

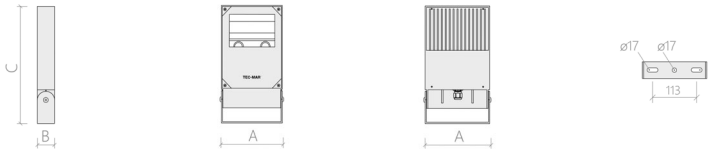

**ACC071**
IP66 waterproof connector, 4P + E (16A - 400V).



**ACC139**
Chromed steel 320 x 240 mm protection grid.



**ACC159**
Bracket with marine treatment resistant to salt fog.



**ACC215**
Floodlights pole bracket. Installation: top-pole, double top-pole, half pole and dable half-pole. Silver color.

TEC-MAR®
LIGHTING

**TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy**
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.