POLAR HP/RR

7030RR4190GL

TEC-MAR LIGHTING





SPECIFIC PRODUCT

Mod	RR
Color	Silver
Installation	Indoor and outdoor led floodlight, with floor, wall, pole and ceiling mounting
Application	Indoor, Outdoor
Materials	Die cast aluminium body, coated with polyester anticorrosion powder, silver color. 4 mm thick tempered transparent glass, silicon gasket
Insulation class	Classe I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	65° asymmetric beam matt satin aluminium reflector
Beam angle	65°
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	- 1000 mm long H07RN-F 3x1mm² neoprene cable. - Cable gland with integrated anticondensation valve.
Windage	0,126 m2
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
190	-	4000°K - CRI>80	on/off	29796	157	295	55	425	-	5.6

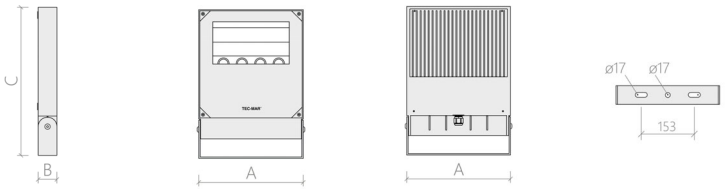

RELATED ACCESSORIES



ACC069
IP66 waterproof connector,e 2P + E (16A - 400V).



ACC071
IP66 waterproof connector, 4P + E (16A - 400V).



ACC140
Chromed steel 370 x 280 mm protection grid.



ACC160
Bracket with marine treatment resistant to salt fog.



ACC215
Floodlights pole bracket. Installation: top-pole, double top-pole, half pole and dable half-pole. Silver color.

TEC-MAR
LIGHTING

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.