
COSMIC 1 - Mod. M6

8056M64450GD

TEC-MAR LIGHTING






SPECIFIC PRODUCT

Mod	M6
Color	Silver
Installation	Indoor and outdoor led floodlight, suitable for large areas and sports areas. It can be installed on the ground, on the wall or on a pole
Application	Indoor, Outdoor
Materials	Silver Extruded oxidate aluminium body, zinc-coated and painted bracket, 4 mm thick tempered transparent glass, silicon gasket
Insulation class	Class I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	High efficiency 70° medium beam PC reflector
Beam angle	70°
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	- 2000 mm long H07RN-F 3x1,5 mm² neoprene cable with waterproof connector and remote driver up to 40 m. - Thermal protection integrated in the driver. - Cable gland with integrated anticondensation valve
Windage	0,129 m2
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	L (mm)	P (mm)	H (mm)	D (mm)	Kg
450	-	4000°K - CRI>70	dali	76555	171	615	240	120	-	9.5

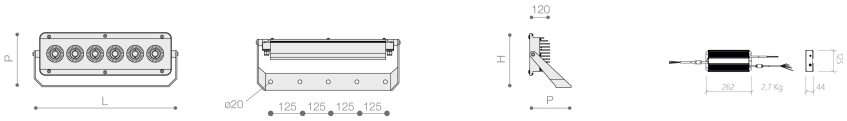

RELATED ACCESSORIES



ACC136
4x32 aiming scope for projectors.



ACC137
Day and night aiming laser for projectors.



ACC167
Fixing plate for remote drivers on the bracket.



ACC233
Adjustable anti-light pollution visor for Cosmic 1 series.

TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.