GEO - Mod. PS

9300PS3027MR

TEC-MAR LIGHTING





SPECIFIC PRODUCT

Mod	PS
Color	Graphite
Installation	LED fixture for street
Application	Outdoor
Materials	Die-cast aluminum body painted with anti-corrosion polyester thermosetting powder color graphite, 4 mm thick high-transparency tempered glass, silicone gasket
Insulation class	Class II
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	EN13201 Class ME bi-asymmetrical street optics with highperformance PMMA lenses. Extra-clear tempered flat glass diffuser 4mm thick.
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	- 60 mm diameter painted pole bracket included. - 10kV Surge Protection. - 1500 mm long H07RN-F neoprene cable.
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	L (mm)	P (mm)	H (mm)	D (mm)	Kg
27	-	3000°K - CRI>70	virtual midnight	3875	144	460	170	55	-	7.2





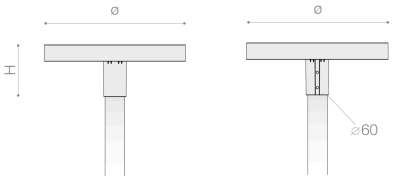

RELATED ACCESSORIES



ACC069
IP66 waterproof connector,e 2P + E (16A - 400V).



ACC071
IP66 waterproof connector, 4P + E (16A - 400V).



ACC238
Photosensor for street lighting with Zhaga D4i socket.



ACC251
Graphite colored light diffuser.

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.