# Velia Tilt

5 year warranty





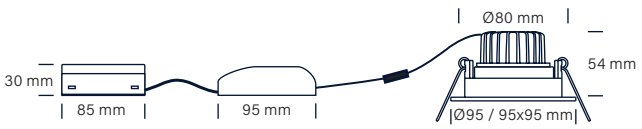


## Technical data

| | |
|---|---|
| **Voltage** | 220-240 VAC 50 Hz |
| **Colour rendering** | CRI>95 |
| **Expected lifespan (installed directly in insulation)** | 30,000 hours L70 B50 |
| **Expected lifespan** | 50,000 hours L90 B10<br>100,000 hours L70 B50 |
| **Dimmable** | Yes, trailing edge |
| **Flicker free** | Yes, according to the latest Ecodesign / ErP directive |
| **SVM <0.4** | Yes |
| **PstLM <1** | Yes |
| **SDCM** | <3 |
| **Beam angle** | 38° |
| **Cut out** | Ø80 mm |
| **Installation height** | 54 mm |
| **Exterior dimension** | Ø95 mm / 95 x 95 mm |
| **Dimension driver** | L: 95 mm, W: 45 mm, H: 30 mm |
| **Dimension connector box** | L: 85 mm, W: 55 mm, H: 30 mm |
| **Tilt angle** | 38° |
| **Possibility of through wiring** | Yes, 3G1.5 |
| **IP rating** | IP44 (is intended for installation in areas 1 and 2) |
| **Insulation class** | Class II |
| **Material** | Plastic, aluminium, glass |
| **Environment** | Indoors |
| **Warranty** | 5 years |
| **Approvals** | CE |

## Product information

- Approved for installation directly in insulation and flammable materials
- High colour rendering index – CRI>95
- High lumen output
- Glare free
- Flicker free according to the latest Ecodesign / ErP directive
- Quick and easy mounting with springs
- Comes with a removable driver, which makes it easy to connect the downlight, for example, after painting the ceiling
- Screwless terminal block in the connector box
- For the Velia Tilt Dim to Warm the color temperature (Kelvin) changes by dimming
- Ceiling thickness for mounting is up to 26 mm

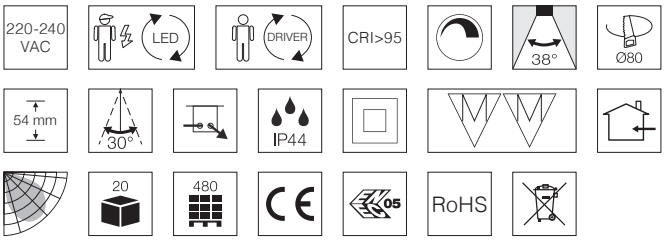


NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Please refer to our website nordtronic.com, where you can find product information, documents, dimming overview etc.

All rights reserved by Nordtronic A/S | Flade Engvej 4 | DK-9900 Frederikshavn | +45 7020 9531
Subject to printing errors.

# Velia Tilt

5 year warranty





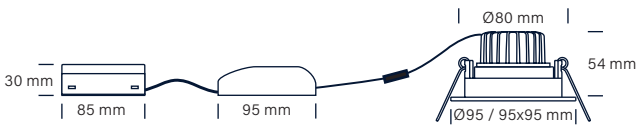


### Velia Tilt | 10.9W | 2700K | 650lm

| Item no. | EAN no. | Design, colour | Light source |
|---|---|---|---|
| 31121012 | 5704629000049 | ○ matt white | 9W LED, item no. 31120002 G |
| 31121092 | 5704629000872 | ○ matt black | 9W LED, item no. 31120002 G |
| 31121032 | 5704629000063 | □ matt white | 9W LED, item no. 31120002 G |

### Velia Tilt | 10.9W | 3000K | 740lm

| Item no. | EAN no. | Design, colour | Light source |
|---|---|---|---|
| 31121013 | 5704629000056 | ○ matt white | 9W LED, item no. 31120003 G |
| 31121093 | 5704629000889 | ○ matt black | 9W LED, item no. 31120003 G |
| 31121033 | 5704629000070 | □ matt white | 9W LED, item no. 31120003 G |

### Velia Tilt Dim to Warm | 12.7W | 1800-3000K | 850lm

| Item no. | EAN no. | Design, colour | Light source |
|---|---|---|---|
| 31121017 | 5704629000032 | ○ matt white | 11W LED Dim to Warm, item no. 31120007 G |
| 31121097 | 5704629000896 | ○ matt black | 11W LED Dim to Warm, item no. 31120007 G |

Please refer to our website nordtronic.com, where you can find product information, documents, dimming overview etc.
All rights reserved by Nordtronic A/S | Flade Engvej 4 | DK-9900 Frederikshavn | +45 7020 9531
Subject to printing errors.