

Installation Instructions

Instrucciones de instalación, Instructions d'installation, Installationsanleitung, إرشادات التركيب ,
Installatie-instructies, Instruções de instalação, Installatie-instructies,
設置手順説明, **Οδηγίες εγκατάστασης**

Product Code:[AGAMMINI/1/]

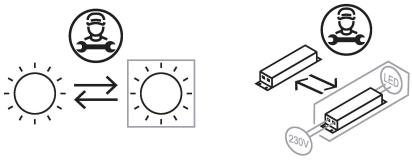


Master
Translations
QR Link

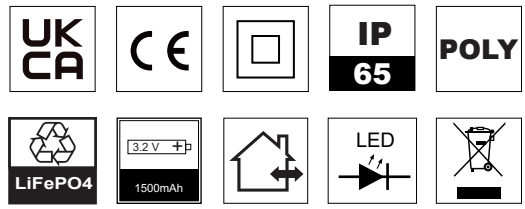


1



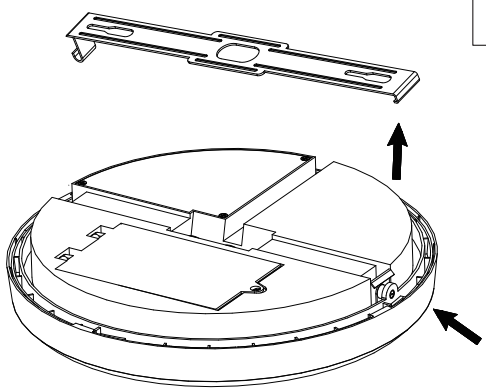


Press this switch to remove the mounting bracket

2

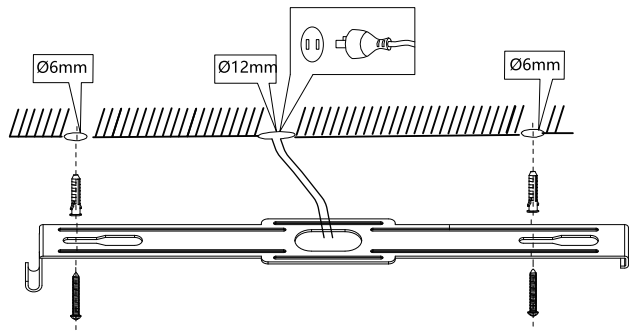


Fix the mounting bracket to the ceiling

3

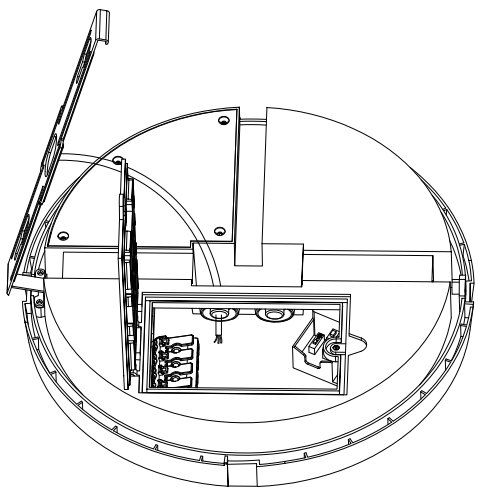

Open the cover to connect wiring

4

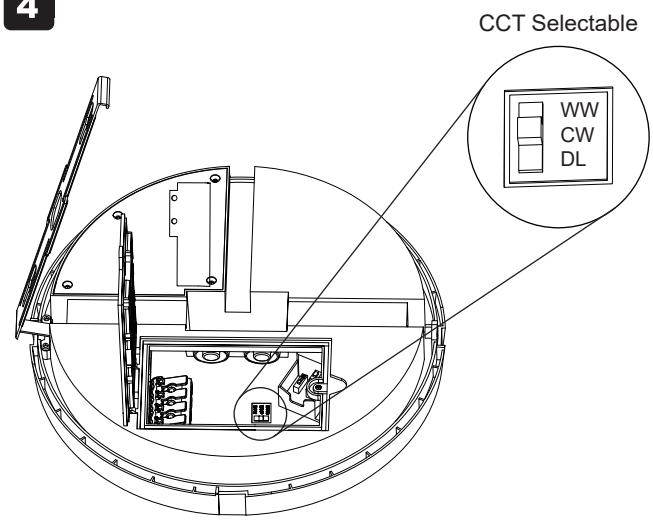

Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56

www.ansell-lighting.com


Warrington Tel: +44 (0)1942 433333 Belfast Tel: +44 (0)2890 773750 International Tel: +44 (0)1942 433343 Spain Tel: 00 34 938 005642

Issue Number: [1]


5


Wiring Diagram

A.With emergency function

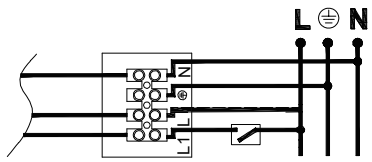


B.Without emergency function

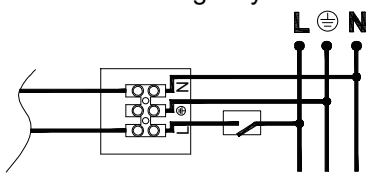

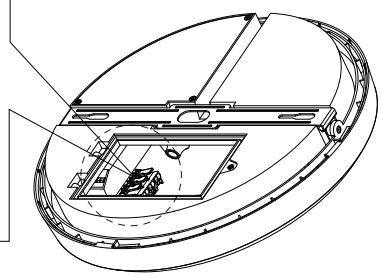



6

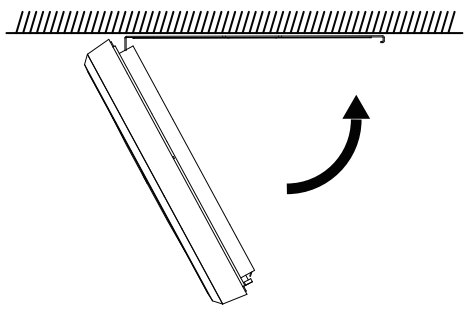


Hang the fitting on one end of the mounting bracket

7

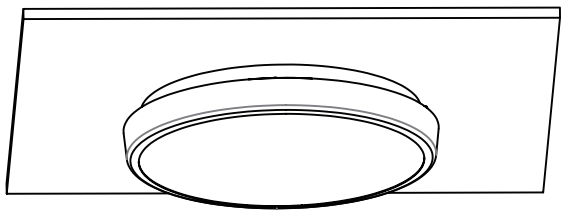





ON-OFF Setting



3W



7W



Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56


www.ansell-lighting.com

Warrington Tel: +44 (0)1942 433333 Belfast Tel: +44 (0)2890 773750 International Tel: +44 (0)1942 433343 Spain Tel: 00 34 938 005642

Issue Number: [1]

/MWS Settings Instructions


1




2 Detection Range




3 Hold Time




4 Daylight Sensor




5 Stand-by Time

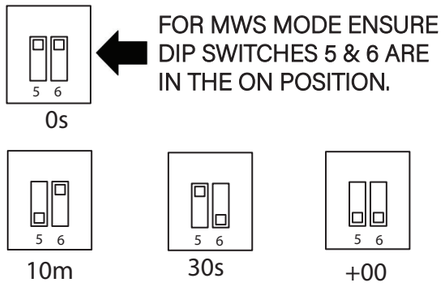

6 Sensor Mode





7 50% 10% Stand-by Light Level



Note :
when used in the low output (3W)
do not use 10% setting,
Minimum is 30% stand-by time


SENSOR COVERAGE





8 **Output current setting**


Output current 7 Options are optional. Set this parameter by the combination of (1,2,3,4) DIP switch up or DIP switch down. Dip switch mode (left).



Output current

1	2	3	4	
↓	↓	↓	↓	55mA
↑	↓	↓	↓	150mA
↑	↑	↓	↓	350mA
↓	↓	↑	↓	400mA
↑	↓	↑	↓	480mA

WIRING DIAGRAMS

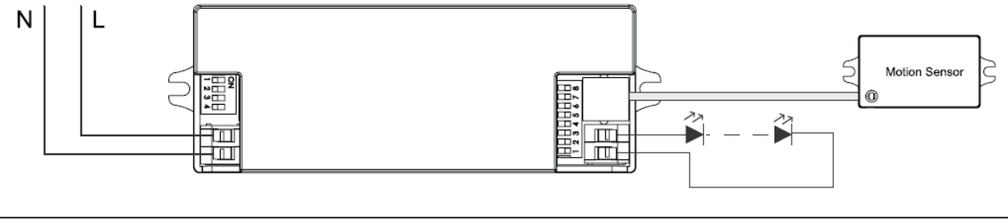

Mounting Height: 2,5 - 4m Max.
Microwave Frequency: 5.8GHz+/-75MHz
Microwave Power: <0.5mW
Detection Radius: 4m - 7m
Detection Angle: Ceiling 360°

ⓘ Detection is possible through doors, panels, glass and thin walls.

Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD
Warrington Tel: +44 (0)1942 433333

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ
Belfast Tel: +44 (0)2890 773750

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56
International Tel: +44 (0)1942 433343

www.ansell-lighting.com
Spain Tel: 00 34 938 005642

Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD
Warrington Tel: +44 (0)1942 433333

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ
Belfast Tel: +44 (0)2890 773750

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56
International Tel: +44 (0)1942 433343

www.ansell-lighting.com
Spain Tel: 00 34 938 005642

Issue Number: [1]