

LITECOM Touchpanel 2 TCI

Touch panel wall-reces, wall surf.-mount

Art. no. 24165702

Touch panel with 7" colour touch screen for operating a LITECOM installation, wall recessing, wall surface-mounting

Application

Maximum intuition when configuring and operating a LITECOM system: the touch panel is ideal for rooms used by different people, such as conference rooms, lecture theatres, seminar rooms and training venues, but also prestigious premises such as offices, museums, galleries and shops. Operation is by direct finger control on a touch-sensitive colour display with slimline surround.

The clear user interface guides the user through the different, well-organised levels. The LITECOM Touchpanel 2 TCI can therefore be used with confidence, even by people unfamiliar with LITECOM.

Design notes

- Power supply: 22161814 SUP24VDC/1.5A (not included in scope of supply)
- Mounting box for flush-mounting or wall recessing: 28000376 MRW Touchpanel TCI (not included in scope of supply)
- Surface-mounted housing: 24165674 MSW Touchpanel TCI (not included in scope of supply)
- The user interface is specified by the LITECOM system
- The touch panel must only be used in combination with a LITECOM system
- Up to seven LITECOM CCD connections possible




Functional description

The touch panel is for displaying the LITECOM operating and configuration interface.

The network settings and connection settings to the LITECOM CCD are implemented using the user interface of the touch panel following device switch-on.

Display of the LITECOM operating and configuration interface is in full screen mode via the integrated APP.

Wiring scheme

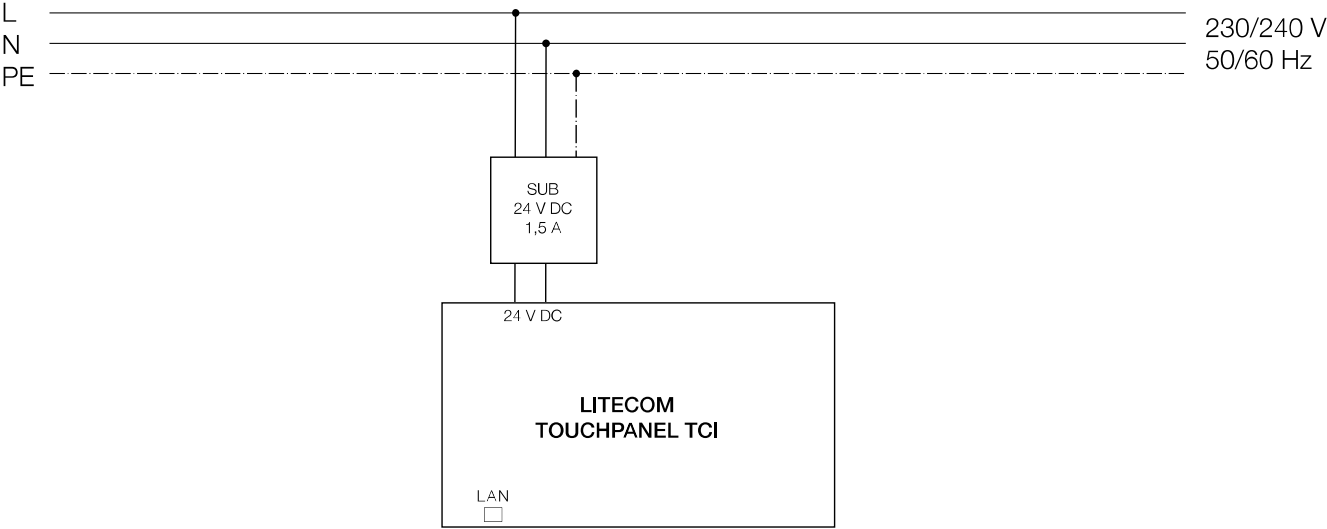

Mounting and installation instructions

- The 24 V DC power supply is connected via the supplied screw/plug-in terminal on the rear of the touch panel.
- Flush-mounting or surface-mounting (wall recessing with MRW Touchpanel TC (28 000 376), wall surface-mounting with MSW Touchpanel TCI (24 165 674)) using supplied Allen key
- Recommended installation height: top edge 1.50 m.

Technical data

Interface	1 x 100/1000 Base-T Ethernet (LAN)
Touchscreen	capacitive 7" multi-touch display Resolution: 1024 x 600 pixels
Power loss	max. 16.3 W with operation max. 8.1 W in standby
Installation	Wall recessing with MRW Touchpanel TCI (28 000 376) Wall surface-mounting with MSW Touchpanel TCI (24 165 674)
Operating temperature	0–35 °C
Permissible ambient temperature ta	Storage: -20–+70° C
Protection type	IP20
Power supply	external power supply unit
relative humidity	10–90 %, no condensate
Miscellaneous	Cooling: no fans
Dimensions	190 x 126 x 45 (W x H x D, in mm)
Weight	Approx. 0.7 kg

Dimension

