


CRISTAL ICE

Item code **CI1303**

Descriptive code **CI24N20EGRT-P**



A=380mm B=180mm C=58mm

Luminaire description


- CRISTAL ICE WALL 565LM 2H N/M ENERGY TEST

Technical characteristics

- Function: Energy Test (Self-contained with self-diagnosis)
- Duration: 2h
- Type: N/M (Non Maintained)
- Medium flux in emergency: 565lm
- Minimum flux in emergency (EN 60598-2-22): 562lm
- Battery: Li-FePO4 6,4V 3,8Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 0,2W
- Insulation class: II
- Protection degree: IP65
- Working temperature: -30°C to +40°C
- Colour: Grey
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: wall, recessed* (* with accessory)

Light source characteristics

- Type: LED
- Lamps: 20 LED
- Color temperature: 6000K

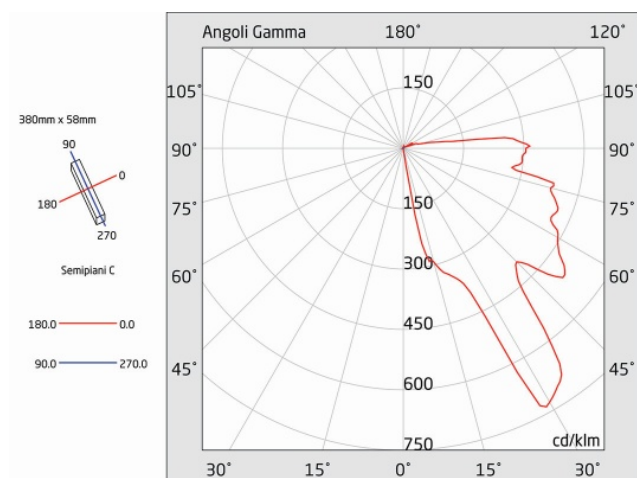

An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 17/05/2021

TECHNICAL SHEET

Emergency luminaire

CRISTAL ICE

Item code **CI1303**

Descriptive code **CI24N20EGRT-P**

Mounting accessories



A013
PROTECTIVE GRATING



A019
WALL BOX RECESSED INSTALLATION
CRISTAL



A328
LARGE RAIN PROTECTION IN STAINLESS
STEEL

Commander



A350
CONTROLLER FOR THE REMOTE
MANAGEMENT OF REST MODE



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 17/05/2021