TECHNICAL SHEET

Emergency luminaire

SELFIE

Item code **SI1205**

Descriptive code **SI08N10ABR**

IP42 IK07



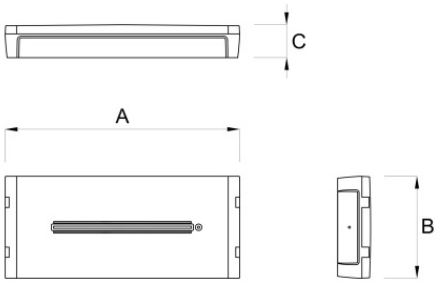

A=230mm B=100mm C=32mm

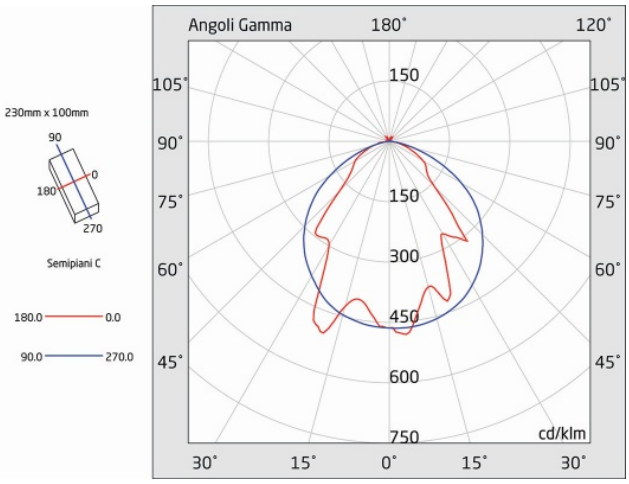

Luminaire description

- SELFIE 170LM 1H NM/M IP42 REST MODE

Technical characteristics

- Function:Rest Mode (Self-contained with rest mode)
- Duration: 1h
- Tipo: SE/SA (Solo Emergenza / Sempre Acceso)
- Maintained mode can be turned on/off with an external switch (with accessory)
- Minimum flux in emergency (EN 60598-2-22): 170lm
- Flux in permanent mode: 85lm
- Battery: Li-FePO4 3,2V 1,5Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 2,0W
- Insulation class: II
- Protection degree: IP42
- Protection degree against mechanical impacts: IK07
- Working temperature: 0°C to +40°C
- Colour: White
- Signaling visibility with pictogram (EN 1838): 17 m
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: wall, ceiling, flag-style*, track*, busbar*, recessed*, 45° bracket* (* with accessory)
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 20 LED
- Color temperature: 6000K

TECHNICAL SHEET

Emergency luminaire

SELFIE

Item code **SI1205**

Descriptive code **SI08N10ABR**

Mounting accessories



A005

BUSBAR KIT



A014

PROTECTIVE GRID



A027

IP 65 KIT FOR SELFIE



A045

PLASTERBOARD AND FALSE CEILING FASTENING KIT SELFIE



A046

SIGNALLING KIT SELFIE



A047

KIT FOR FLAG-STYLE FASTENING



A310

WHITE ELECTRIFIED TRACK ADAPTER



A331

KIT FOR PERMANENT SWITCHING

Pictograms



A171

PICTOGRAM FOR PRODIGY ARROW LEFT



A172

PICTOGRAM FOR PRODIGY ARROW RIGHT



A173

PICTOGRAM FOR PRODIGY ARROW DOWN

Commander



A350

CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE