TECHNICAL SHEET

Signalling luminaire

ASTRA

IP40

Descriptive code **AS22F30ANRT-AB**



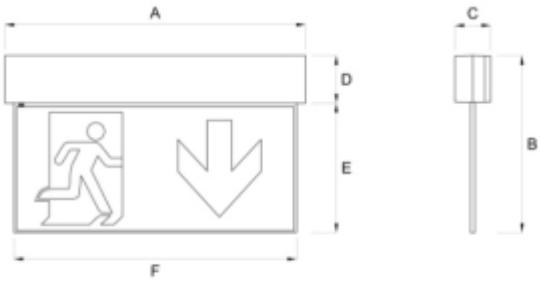

A=271mm B=167mm C=33mm D=43mm E=123mm F=255mm

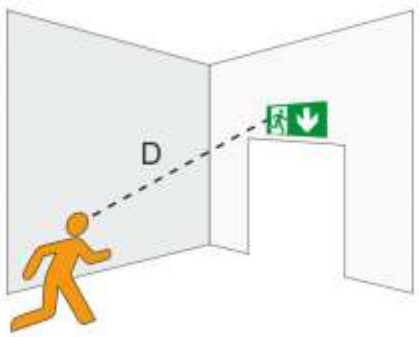

Signaling visibility: 22 meters

Luminaire description

- ASTRA 22M BLACK 1H/2H/3H NM/M IP40 ENERGY TEST

Technical characteristics

- Function:Energy Test (Self-contained with self-diagnosis)
- Duration: 1h/2h/3h, selectable
- Type: NM/M (Non-Maintained/Maintained)
- Maintained mode can be turned on/off with an external switch (with accessory)
- Minimum flux in emergency (EN 60598-2-22): lm
- Flux in permanent mode:
- Battery: Li-FePO4 3,2V 1,5Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power (240Vdc):
- Apparent power (240Vdc):
- Input power with charged battery: 2,9W
- Insulation class: II
- Protection degree: IP40
- Protection degree against mechanical impacts: IK05
- Working temperature: 0°C to +40°C
- Colour: Black
- Signaling visibility (EN 1838): 22 meters
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Kit of pictograms included
- Installation: wall, ceiling, flag-style, track*, recessed*, 503 box recessed*, suspended* (* with accessory)
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 24 LED
- Color temperature: 6000K

TECHNICAL SHEET

Signalling luminaire

ASTRA

Descriptive code **AS22F30ANRT-AB**

Standard accessories



A081

BRACKET SERIES ASTRA



A161

PICTOGRAMS FOR ASTRA, LYRA EVO 22M

Mounting accessories



A001

KIT FOR FALSE CEILING WITH GREY METAL SHEET



A002

KIT FOR SUSPENSION INSTALLATION ASTRA



A016

PROTECTIVE GRID



A068

BRACKET FLUSH BOX 503 SERIES ASTRA



A279

KIT FOR FALSE CEILING WITH WHITE METAL SHEET



A310

WHITE ELECTRIFIED TRACK ADAPTER



A330

KIT FOR PERMANENT SWITCHING/COMMANDER FOR ASTRA

Pictograms



A277

PICTOGRAM 22M DOWN DIRECTION LEFT

TECHNICAL SHEET

Signalling luminaire

ASTRA

Descriptive code **AS22F30ANRT-AB**

Commander



A350

CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE