TECHNICAL SHEET


Emergency luminaire

VIALED TEK


IP42 IP20

Descriptive code	**VK03N10EBRT-AB**
Lens	asymmetrical



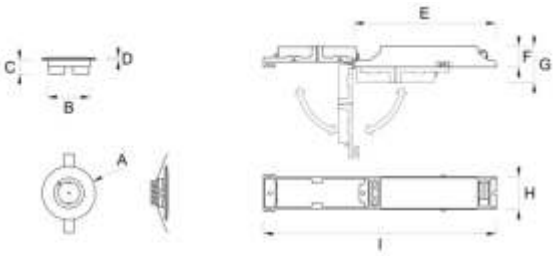

A=68mm B=55mm C=18mm D=3mm
E=182mm F=27mm G=47mm
H=46mm I=297mm
Ø=55mm

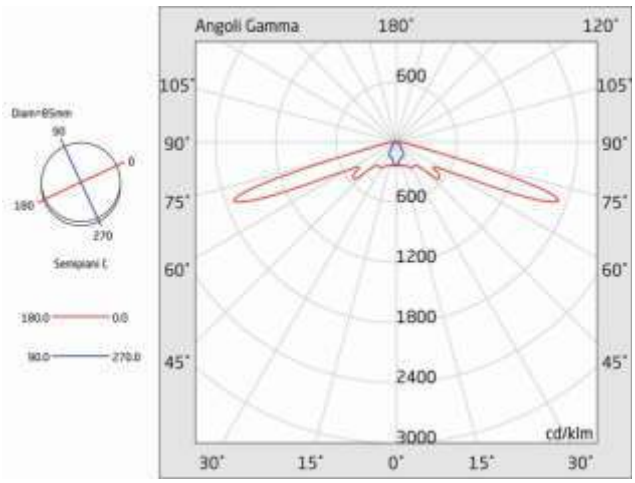

Luminaire description

- VIALED TEK WHITE 340LM 1H N/M ENERGY TEST QUALIFIED

Technical characteristics

- Optics: standard height
- Function:Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type:NM (Non Maintained)
- Flux in emergency: 340lm
- Battery: Li-FePO4 3,2V 1,5Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 0,8W
- Insulation class: II
- Protection degree: IP42 (from the bottom), IP20 (from the top)
- Working temperature: 0°C to +40°C
- Colour: White
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: recessed,

Light source characteristics

- Type: LED
- Lamps: 1 LED
- Color temperature: 6000K

TECHNICAL SHEET


Emergency luminaire

VIALED TEK


IP42 IP20

Descriptive code	**VK03N10EBRT-AB**
Lens	symmetrical



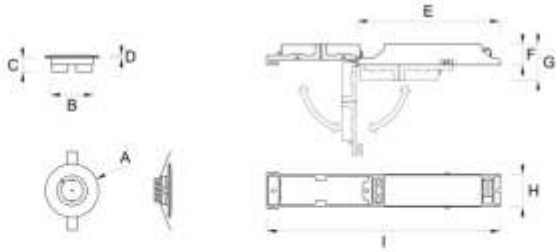

A=68mm B=55mm C=18mm D=3mm
E=182mm F=27mm G=47mm
H=46mm I=297mm
Ø=55mm

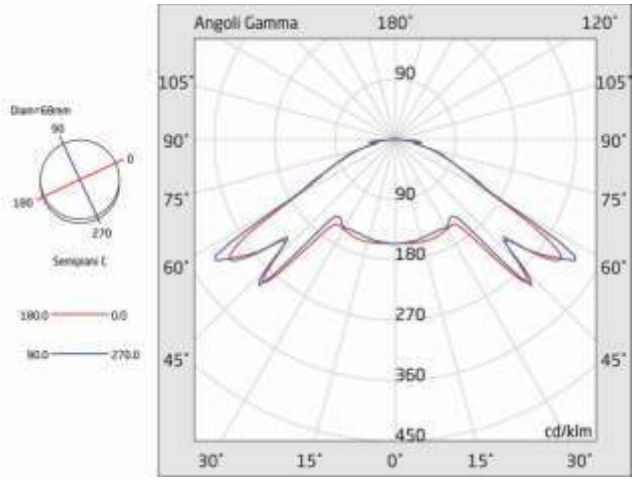

Luminaire description

- VIALED TEK WHITE 340LM 1H N/M ENERGY TEST QUALIFIED

Technical characteristics

- Optics: standard height
- Function:Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type:NM (Non Maintained)
- Flux in emergency: 340lm
- Battery: Li-FePO4 3,2V 1,5Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 0,8W
- Insulation class: II
- Protection degree: IP42 (from the bottom), IP20 (from the top)
- Working temperature: 0°C to +40°C
- Colour: White
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: recessed,

Light source characteristics

- Type: LED
- Lamps: 1 LED
- Color temperature: 6000K

TECHNICAL SHEET

Emergency luminaire

VIALED TEK

IP42 IP20

Descriptive code **VK03N10EBRT-AB**

Commander



A350

CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE