TECHNICAL SHEET


Emergency luminaire


VIALED EVO MINI BOX

IP42


Descriptive code **VB03F10ANRT**

Lens **asymmetrical**

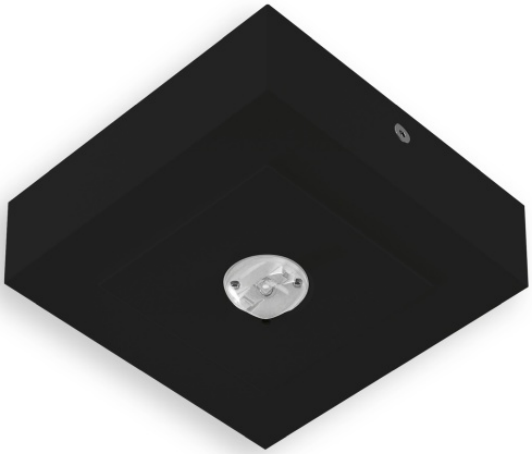



A=130mm B=130mm
C=125mm D=40mm

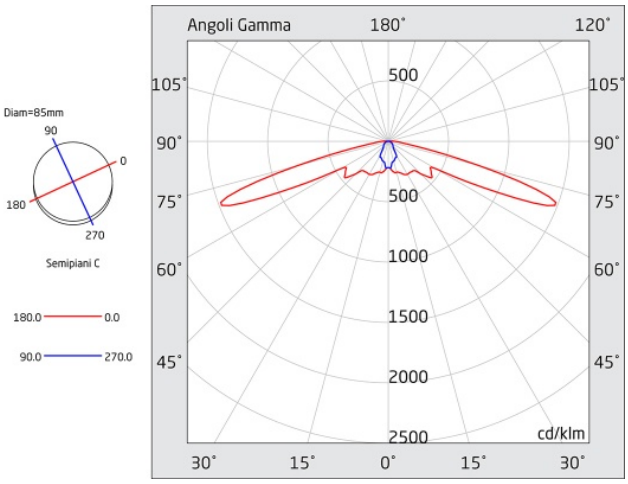

Luminaire description

• VIALED EVO M. BOX 450LM 1H NM/M TEST BLACK RAL 9005 MATT

Technical characteristics

• Optics: standard height
• Function:Energy Test (Self-contained with self-diagnosis)
• Duration: 1h
• Type: NM/M (Non-Maintained/Maintained)
• Maintained mode can be turned on/off with an external switch (with accessory)
• Minimum flux in emergency (EN 60598-2-22): 450lm
• Flux in permanent mode: 450lm
• Battery: Li-FePO4 3,2V 1,5Ah
• Battery type: Lithium iron phosphate
• Recharge time: 12h
• Battery status: battery disconnection warning
• Power supply: 230Vac
• Input power with charged battery: 5,7W
• Insulation class: I
• Protection degree: IP42
• Working temperature: 0°C to +40°C
• Colour: Black - RAL 9005
• Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
• Compliant to RoHS2 2011/65/UE
• Glow wire 850 °C
• Installation: ceiling, track* (* with accessory)
• 5 year warranty

Light source characteristics

• Type: LED
• Lamps: 1 LED
• Color temperature: 6000K

TECHNICAL SHEET


Emergency luminaire


VIALED EVO MINI BOX

IP42


Descriptive code **VB03F10ANRT**

Lens **symmetrical**

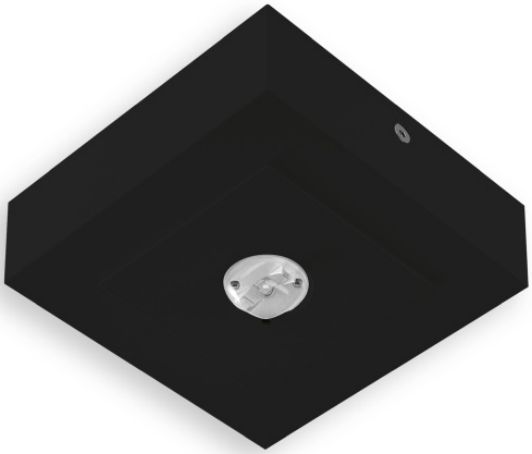



A=130mm B=130mm
C=125mm D=40mm

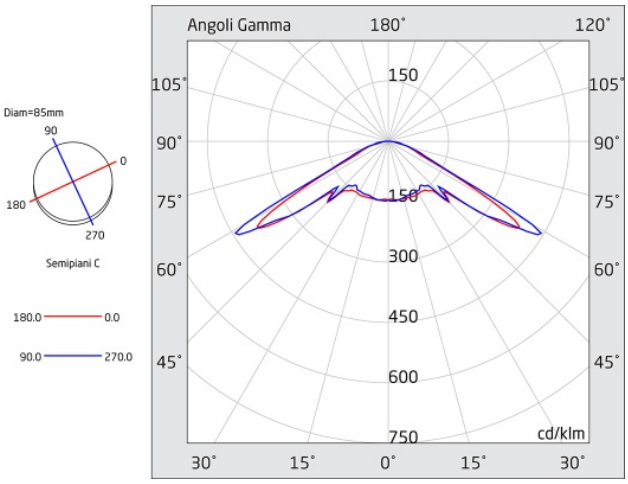

Luminaire description

• VIALED EVO M. BOX 450LM 1H NM/M TEST BLACK RAL 9005 MATT

Technical characteristics

• Optics: standard height
• Function:Energy Test (Self-contained with self-diagnosis)
• Duration: 1h
• Type: NM/M (Non-Maintained/Maintained)
• Maintained mode can be turned on/off with an external switch (with accessory)
• Minimum flux in emergency (EN 60598-2-22): 450lm
• Flux in permanent mode: 450lm
• Battery: Li-FePO4 3,2V 1,5Ah
• Battery type: Lithium iron phosphate
• Recharge time: 12h
• Battery status: battery disconnection warning
• Power supply: 230Vac
• Input power with charged battery: 5,7W
• Insulation class: I
• Protection degree: IP42
• Working temperature: 0°C to +40°C
• Colour: Black - RAL 9005
• Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
• Compliant to RoHS2 2011/65/UE
• Glow wire 850 °C
• Installation: ceiling, track* (* with accessory)
• 5 year warranty

Light source characteristics

• Type: LED
• Lamps: 1 LED
• Color temperature: 6000K

VIALED EVO MINI BOX

Descriptive code **VB03F10ANRT**

Mounting accessories



A305

KIT FOR PERMANENT SWITCHING/COMMANDER



A310

WHITE ELECTRIFIED TRACK ADAPTER



A341

SIGNALLING KIT VIALED MINI BOX



A367

BLACK ELECTRIFIED TRACK ADAPTER

Commander



A350

CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE