TECHNICAL SHEET

Emergency luminaire

DUAL LED

Item code **DU1302**

Descriptive code **DU04F10EGST**

IP65 IK08



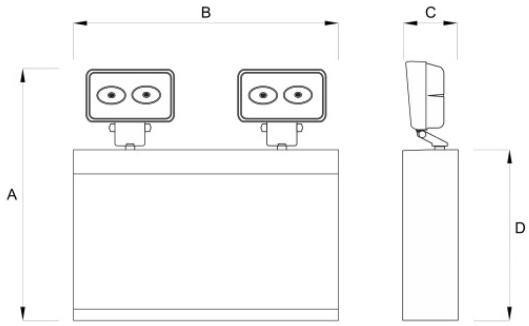

A=350mm B=302mm C= 90mm D= 252mm

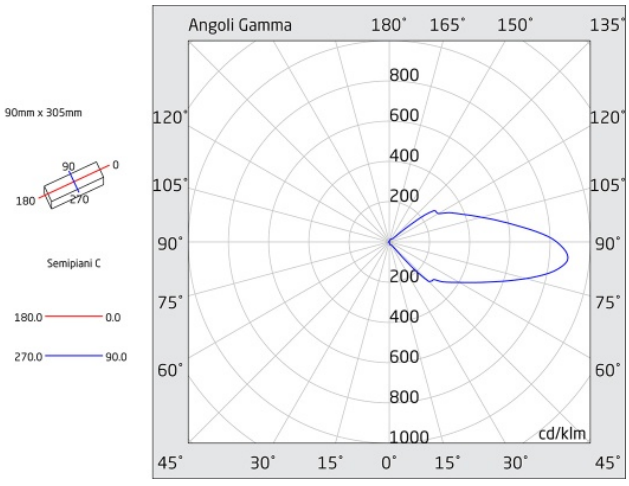

Luminaire description

- DUAL LED 3200LM 1H N/M IP65 ENERGY TEST

Technical characteristics

- Function:Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type:NM (Non Maintained)
- Medium flux in emergency: 3200lm
- Battery: Li-FePO4 12,8V 6Ah
- Battery type: Lithium iron phosphate
- Recharge time: 24h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Insulation class: II
- Protection degree: IP65
- Protection degree against mechanical impacts: IK08
- Working temperature: 0°C to +40°C
- Colour: White
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 60598-2-8, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: wall

Light source characteristics

- Type: LED
- Lamps: 2x2 LED