TECHNICAL SHEET

Signalling luminaire

BIG ONE

Item code **BG1202**

Descriptive code BG60N30ABR

IP40



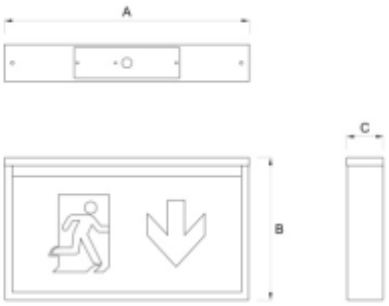

A=646mm B=377mm C= 72mm

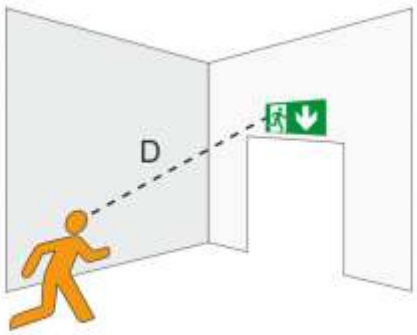

Signaling visibility: 60 meters

Luminaire description

- BIG ONE 60M 3H NM/M IP40 REST MODE

Technical characteristics

- Function:Rest Mode (Self-contained with rest mode)
- Duration: 3h
- Type: NM/M (Non-Maintained/Maintained)
- Maintained mode can be turned on/off with an external switch
- Battery: Li-FePO4 6,4V 3,8Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 10,7W
- Insulation class: I
- Protection degree: IP40
- Working temperature: 0°C to +40°C
- Colour: White - RAL 9003
- Signaling visibility (EN 1838): 60 meters
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: wall, ceiling, suspended* (* with accessory)
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 40 LED
- Color temperature: 6000K

TECHNICAL SHEET

Signalling luminaire

BIG ONE

Item code **BG1202**

Descriptive code BG60N30ABR

Mounting accessories



A003

KIT FOR SUSPENSION INSTALLATION BIG ONE

Pictograms



A136

PICTOGRAM FOR BIG ONE 60M LEFT ARROW



A137

PICTOGRAM FOR BIG ONE 60M RIGHT ARROW



A139

PICTOGRAM FOR BIG ONE 60M DOWN ARROW LEFT



A140

PICTOGRAM FOR BIG ONE 60M DOWN ARROW RIGHT

Commander



A350

CONTROLLER FOR THE REMOTE MANAGEMENT OF REST MODE