Glamox

C25-R300×1200 G2 3000-5000 DALI ML 830 MP

Item No.	C25147561
GTIN	5903531475611
Stock status code	E

Technical specifications

General	
Product shape	Rectangular

LMS System	
Number of DALI addresses	1
LMS Protocol	DALI

Technical Data	
Minimum TA (°C)	0
Maximum TA (°C)	25
IK classification	03
IP classification	40 from underneath \ 20 from above

Light Technical Data	
Light source	LED
Lumen Out (lm)	4086
Lumen Per Watt (lm/W)	120
Lamp colour temp (K)	3000
Colour Rendering Index	80
MacAdam step	3
Energy Class Light Source	E
Minimum Dim Level (%)	1

Driver / Ballast	
Type of LED Driver	DALI ML: Multi lumen
Number of Driver	1

Lifetime	
LED Lifetime L80B50 Ta25 (h)	100 000
Luminous flux decline (LLMF) 50.000h Ta25	0.89

Electrical Data	
Main Feed AC (V) Min	220
Main Feed AC (V) Max	240
Main Feed Frequency Min	50
Main Feed Frequency Max	60
Total Consumption (W)	34.1
Number Of Luminaire MCB 10B	33
Number Of Luminaire MCB 10C	33
Number Of Luminaire MCB 16B	54
Number Of Luminaire MCB 16C	54

Optic	
Optic Name	MP - Micro prismatic diffuser
Diffuser Material Design	Prismatic

Housing	
Body Material	Aluminium
Body Colour	White
Main Body Colour Name	White


Dimensions	
Length (mm)	295
Width (mm)	1195
Height (mm)	34

Mounting	
Product Mounting	Ceiling recessed

The Company reserves the right to change any product specifications without prior notification.

Illustrations



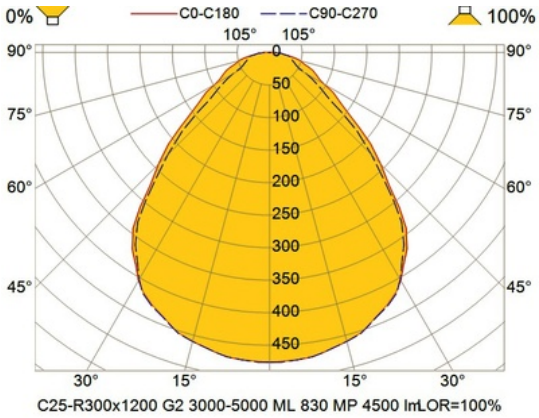

C25-R300x1200 G2 3000-5000 ML 830 MP 4500 lmLOR=100%

The Company reserves the right to change any product specifications without prior notification.