
2779133

ES-SYSTEM

LUMI-S WH 400 E1/ST CR



Ceiling mounted escape route emergency lighting according to all relevant European standards.

E1 / ST means that this item has a built-in emergency light for minimum 1 hour duration. It tests itself according to European emergency light standards. Indicator LEDs on the product communicate the test results.

Item No.	LUM590617
GTIN	5901155906177
Stock status code	A

LiFe

Technical specifications

General	
Product shape	Square

Certificates	
Certification	CNBOP, HACCP

Technical Data	
Minimum TA (ºC)	0
Maximum TA (ºC)	30
IK classification	05
IP classification	65

Light Technical Data	
Light source	LED
Lumen Out (lm)	410
Lumen Per Watt (lm/W)	51
Lamp colour temp (K)	5700
Colour Rendering Index	>70
Light Distribution Up %	0
Light Distribution Down %	100
MacAdam step	3
Light Source Included	True

Driver / Ballast	
Type of LED Driver	HF: Non dimmable
Number of Driver	1

Lifetime	
LED Lifetime L70B50 Ta25 (h)	100 000
LED Lifetime L80B50 Ta25 (h)	100 000
LED Lifetime L90B50 Ta25 (h)	100 000

Electrical Data	
Main Feed AC (V) Min	220
Main Feed AC (V) Max	240
Main Feed Frequency Min	50
Main Feed Frequency Max	60
Total Consumption (W)	8.3
IEC Protection Class	II

Emergency	
Emergency Type	ST = Self test
Duration (hrs)	1
Charging power consumption (Emg) (W)	1.5
Lumen Out In Emergency (lm)	410
Percentage Light Out In Emergency	100
Battery Type	LiFePO4
Battery Form	SideBySide
Battery mAh	2200
Battery Voltage (V)	6.4
Battery Sparepart No	SP-MY-413-LI2200F
Battery Termination	NS39

Optic	
Optic Name	CR - Escape route
Diffuser Material	PMMA
Diffuser Material Design	Clear

Housing	
Body Material	Polycarbonate
Body Colour	WH - White
Main Body Colour Name	White

The Company reserves the right to change any product specifications without prior notification.

Dimensions	
Length (mm)	130
Width (mm)	130
Height (mm)	43
Item Net Weight (kg)	0.3956


Termination	
Termination	5×2.5mm2 Push In

Cable Inlet	
Cable Gland	M20-Polyamide
Number of Glands	2


Mounting	
Product Mounting	Ceiling surface


Logistic Data	
Item Gross Weight (kg)	0.43

Illustrations

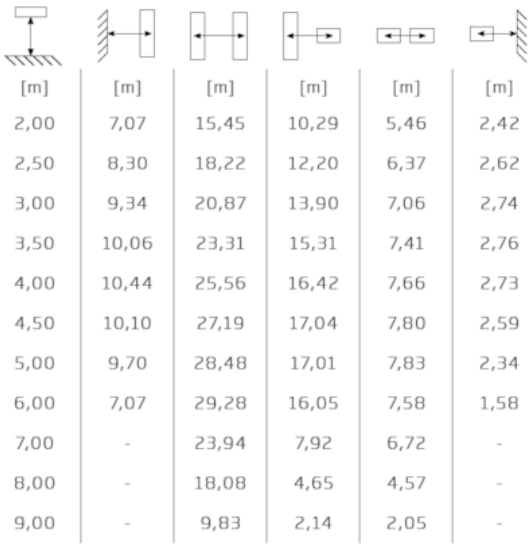


[m]	[m]	[m]	[m]	[m]	[m]
2,00	7,07	15,45	10,29	5,46	2,42
2,50	8,30	18,22	12,20	6,37	2,62
3,00	9,34	20,87	13,90	7,06	2,74
3,50	10,06	23,31	15,31	7,41	2,76
4,00	10,44	25,56	16,42	7,66	2,73
4,50	10,10	27,19	17,04	7,80	2,59
5,00	9,70	28,48	17,01	7,83	2,34
6,00	7,07	29,28	16,05	7,58	1,58
7,00	-	23,94	7,92	6,72	-
8,00	-	18,08	4,65	4,57	-
9,00	-	9,83	2,14	2,05	-

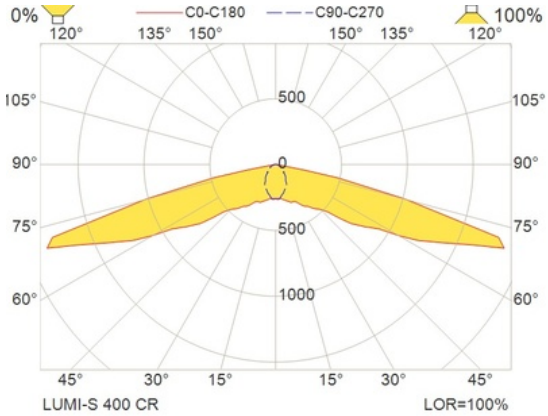

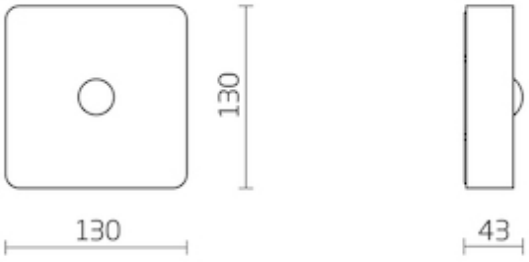

The Company reserves the right to change any product specifications without prior notification.

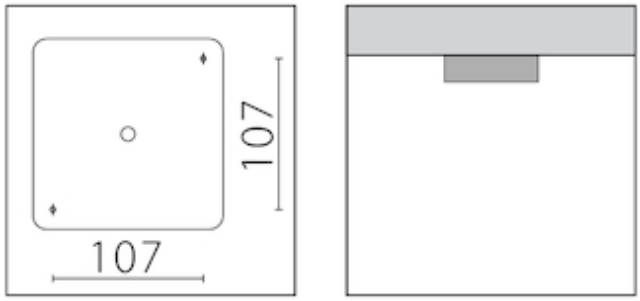

The Company reserves the right to change any product specifications without prior notification.