Glamox

MIR KIT-1200 (M) LED 5000 HF 840

The LED replacement kit for MIR brings a longer product lifetime, a greener profile and low maintenance. To upgrade the MIR T8 version to LED you just have to replace the gear tray, and if it is an emergency version the battery with connection. This item contains just the gear tray . No diffuser or clips

Item Number	MIR093190
GTIN	7054130931904
Stock status	M



Technical specifications

General	
Product shape	Linear

Electrical Data	
EMC Category	EMC1 : EMC B – IEC 60533 Bridge and Open deck
Leakage current (mA)	0.3
Minimum Voltage -10% (VAC)	220
Maximum voltage +10% (VAC)	240
Minimum frequency -5% (Hz)	50
Maximum frequency +5% (Hz)	60
Main Feed DC (V) Min	180
Main Feed DC (V) Max	270
Total consumption (W)	36
Number of luminaires on a 10A MCB type B	6
Number of luminaires on a 10A MCB type C	10
Number of luminaires on a 16A MCB type B	10
Number of luminaires on a 16A MCB type C	17

Certificates	
Marine Approved	true
EX zone	No Ex

Technical Data	
Minimum ambient temperature (°C)	-40
Maximum ambient temperature (°C)	50

Light Technical Data	
Light source	LED
Lumen out (lm)	4913
Lumen per Watt (lm/W)	149
Lamp colour temp (K)	4000
CRI Colour rendering index	>80
MacAdam step	3
Energy class light source	D
Light source included	true

Driver / Ballast	
Type of LED Driver	HF: Non dimmable
Number of Driver	1

Lifetime	
L80 Median useful life LED Ta45 (hr)	100 000

Housing	
Main body material	Aluminium/ zinc-treated steel
Body colour	WH - White
Main body colour name	White

Dimensions	
Length (mm)	1250
Net weight (kg)	2.4472

Logistic Data	
Item gross weight (kg)	2.66

The Company reserves the right to change any product specifications without prior notification.

Images

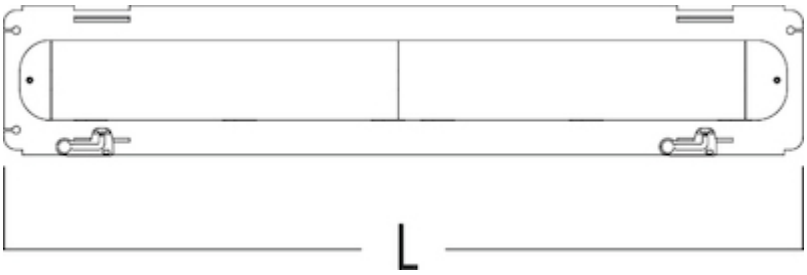
L

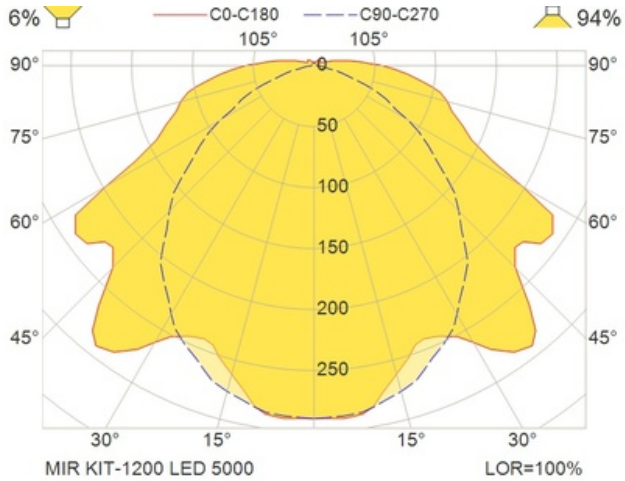
6%
C0-C180
C90-C270
94%
105°
105°
90°
75°
60°
45°
0
50
100
150
200
250
30°
15°
15°
30°
MIR KIT-1200 LED 5000
LOR=100%