Glamox

MIR KIT-600 (M) G2 2500 HF EB3/S 865 FR/PC IP66/67 w/o battery

EB means that this item has External Battery. NB - Battery is NOT included in this item . Battery to be ordered separately (look under spare parts and accessory) ---- Check also if new plug is needed

E3/S or EB3/S means that this item has a built-in emergency light for up to 3 hours duration. EB/S - stands for External Battery and Standard Emergency. The number 3 indicates the emergency time in hours. It is supplied with a standard emergency controller that needs manual testing according to European emergency light standards.



Item Number	MIR102131
GTIN	7054131021314
Stock status	C

Technical specifications

Electrical Data	
EMC Category	EMC1 : EMC B – IEC 60533 Bridge and Open deck
Leakage current (mA)	0.3
Minimum Voltage -10% (VAC)	220
Maximum voltage +10% (VAC)	240
Minimum frequency -5% (Hz)	50
Maximum frequency +5% (Hz)	60
Total consumption (W)	22
Number of luminaires on a 10A MCB type B	6
Number of luminaires on a 10A MCB type C	12
Number of luminaires on a 16A MCB type B	12
Number of luminaires on a 16A MCB type C	24

Optic	
Optic	FR/PC - Frosted diffuser in polycarbonate
Material of diffuser	Polycarbonate
Optic main category	Diffuser

Certificates	
Certification	DNV
Marine Approved	true
EX zone	No Ex

Technical Data	
Minimum ambient temperature (°C)	-20
Maximum ambient temperature (°C)	45
IP classification	66/67

Light Technical Data	
Light source	LED
Lumen out (lm)	2678
Number of lamps	1
Lumen per Watt (lm/W)	149
Lamp colour temp (K)	6500
CRI Colour rendering index	>80
Light distribution up %	2
Light distribution down %	98
MacAdam step	3
Energy class light source	C
Light source included	true

Driver / Ballast	
Type of LED Driver	HF: Non dimmable
Number of Driver	1

Lifetime	
L80 Median useful life LED Ta45 (hr)	100 000

Emergency	
Type of emergency	Standard battery backup
Duration in battery mode (hrs)	3
Charging power consumption (Emg) (W)	1.5

Housing	
Main body material	Steel
Body colour	WH - White
Main body colour name	White

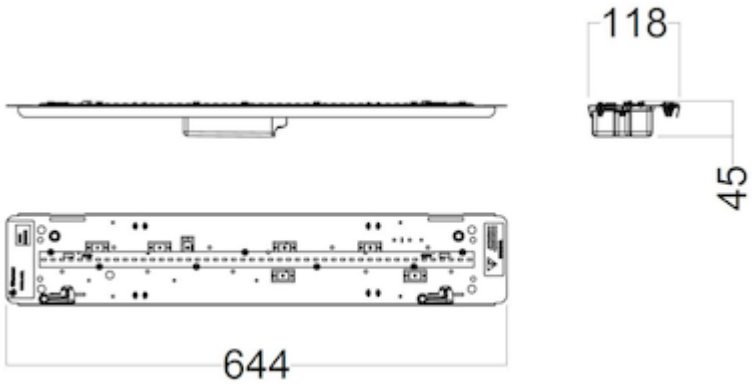
Dimensions	
Length (mm)	645
Net weight (kg)	1.8216

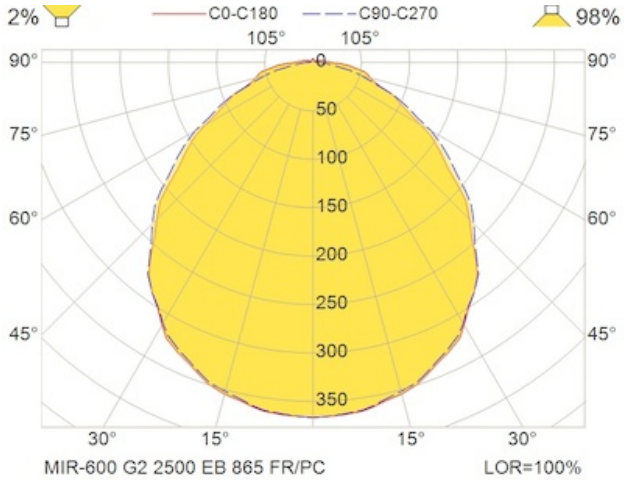
Logistic Data	
Item gross weight (kg)	1.98

Remarks

Contains complete gear tray, diffuser and diffuser clips. Battery not included.

Images


118
45
644


2%
C0-C180
C90-C270
98%
105°
105°
90°
75°
60°
45°
0
50
100
150
200
250
300
350
30°
15°
15°
30°
MIR-600 G2 2500 EB 865 FR/PC
LOR=100%