



Art. Nr.: 96040 ASRD 14



Primary Current:	150
Secondary Current:	5
Burden (VA):	2,5
Accuracy Class:	1

Dimensions:


Round conductor in mm:	3x13,5
Width in mm:	105
Height in mm:	71
Depth in mm:	90

Technical Data:

Therm. nominal continuous current I_{ctn} : $1,0 \times I_{pr}$
 Therm. nominal short-time current I_{th} : $60 \times I_{pr}$, 1 Sek.
 Max. operating voltage U_m : 0,72 kV
 Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 Min.
 Nominal rated frequency: 50 Hz
 Isolation class: E

General Technical Data:

Technical Drawing:

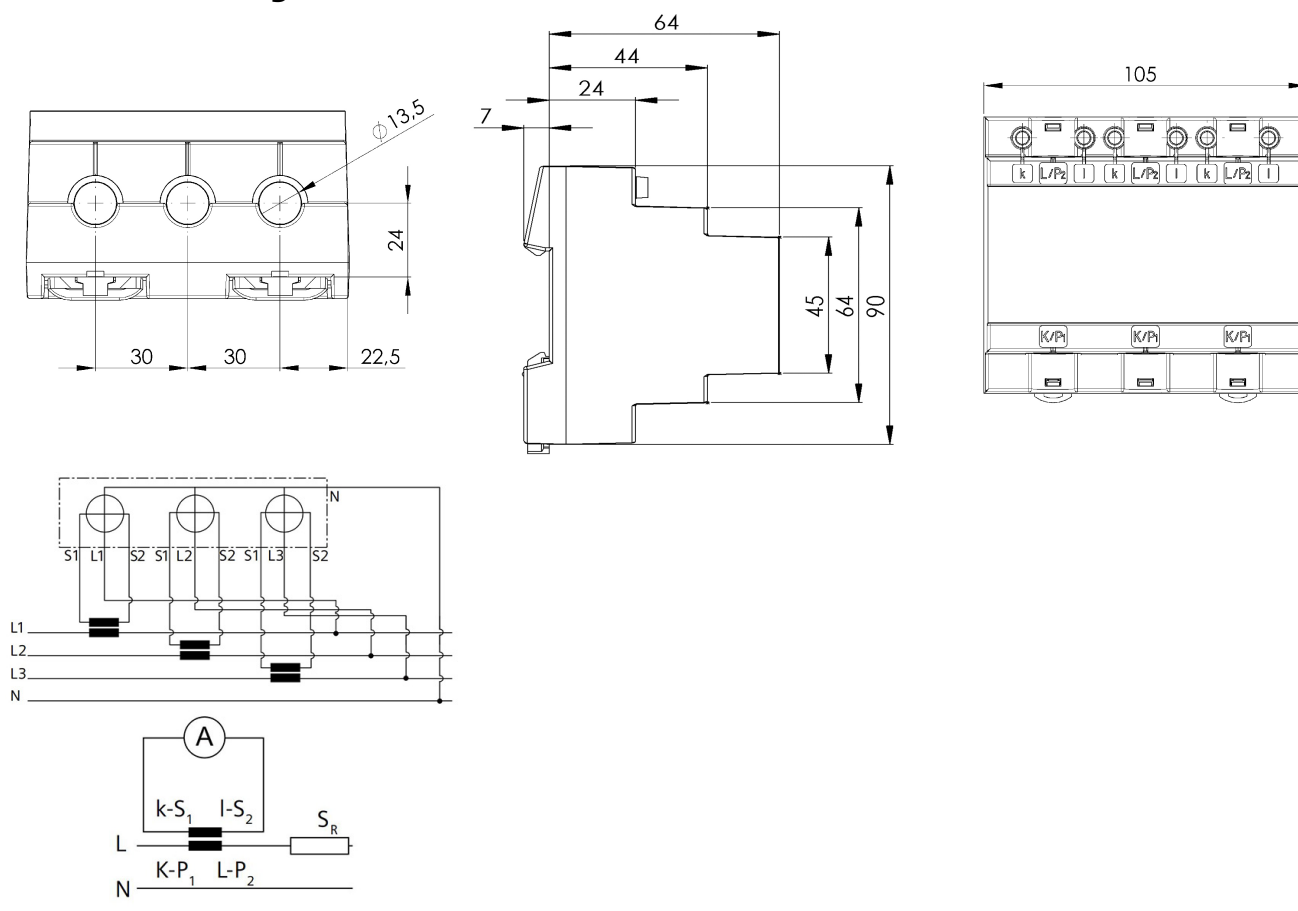

Contact:

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
 Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 15.11.2024