



Art. Nr.: D310-010 ASRD 310.37



Primary Current:	250
Secondary Current:	5
Burden (VA):	2,5
Accuracy Class:	1

Dimensions:

Bus bar 1 in mm:	30x10
Round conductor in mm:	22
Width in mm:	150
Height in mm:	75
Depth in mm:	37


Technical Data:

Therm. nominal continuous current I_{cth} : $1,0 \times I_{pr}$
 Therm. nominal short-time current I_{th} : $60 \times I_{pr}$, 1 Sek.
 Max. operating voltage U_m : 0,72 kV
 Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 Min.
 Nominal rated frequency: 50 Hz
 Isolation class: E

General Technical Data:

Over-current limiting factor:	See rating plate
Working temperature range:	$-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
Storage temperature range:	$-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Unbreakable plastic housing made of black polycarbonate	Flame resistant, ultrasonically welded
Nickel-plated secondary terminals with plus-minus nickel-plated screws	M5x10mm
Custom tariff number	85043129
Applied standards 1	DIN EN 61869-1/2
Applied standards 2	DIN EN 42600-1/2
UL certificated:	Certificate Number - 20100426-E336996

Technical Drawing:

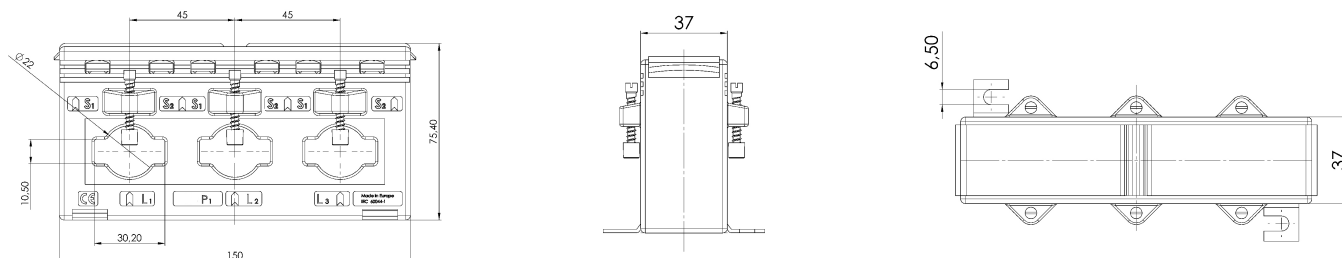

Contact:

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
 Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 15.11.2024