Quality and reliability is our tradition.

KYORITSU

AC LEAKAGE CURRENT TESTER SERIES



CE **ϕ28**

AC 0.1mA~100.0A

- Three AC current ranges : 400mA/4A/100A
- Least affected by external stray magnetic field.
  20mA AC max. in proximity to a 15mm-dia conductor carrying 100A AC
- Frequency Selector Switch to eliminate the effect of harmonics.
- Data hold function
- Sleep function to save battery
- Designed to international safety standard IEC61010-1 CAT.Ⅲ 300V.

KEW SNAP

MODEL 2434

KYORITSU ELECTRICAL INSTRUMENTS WORKS,LTD.

LAYOUT DIAGRAM

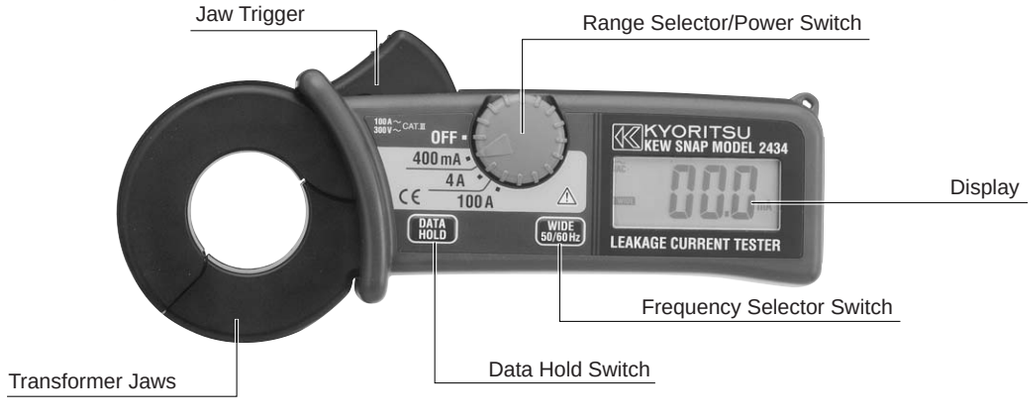

SPECIFICATIONS

● AC Current Ranges (at 23±5°C, RH85% or less)

Range	Measuring Range	Accuracy
400mA	0~399.9mA	±2.0%rdg±4dgt (50/60Hz)
4A	0~3.999A	±3.0%rdg±5dgt (40~400Hz)
100A	0~100.0A	±2.0%rdg±4dgt (50/60Hz) ±3.0%rdg±5dgt (40~400Hz)
Maximum Circuit Voltage		600V AC/DC (between line/neutral) 300V AC/DC (against earth)
Withstand Voltage		3700V AC for 1 minute
Response Time		approx. 2 seconds
Conductor Size		approx. ϕ 28mm
Standard		IEC 61010-1 CAT.Ⅲ 300V IEC 61010-2-032, IEC 61326-1
Effect of External Stray Magnetic Field		20mA AC max. in proximity to a 15mm-dia conductor carrying 100A AC
Dimensions		169(L)×75(W)×40(D)mm
Weight		210g approx.
Power Source		Two R03 or equivalent (DC 1.5V) batteries
Accessories		Carrying Case, 1.5V R03×2, Instruction Manual
Options		8004/8008 (Multi-Trans) These Multi-Trans can not be used for leakage current measurement

Leakage Clamp Meter Series

KEW SNAP MODEL 2433
AC LEAKAGE CURRENT TESTER
AC 40mA/400mA/400A

KEW SNAP MODEL 2432
AC LEAKAGE CURRENT TESTER
AC 4mA/40mA/100A

High Sensitive Model

ϕ40

FEATURES
・Frequency Selector Switch
to eliminate the effect of harmonics.
・Data hold function.
・Peak hold function.
・Sleep function to save battery.



Dimensions	185(L)×81(W)×32(D)mm
Weight	approx. 290g (batteries included)
Power Source	R03 or equivalent (DC1.5V)×2

CE

KEW SNAP MODEL 2413F
AC LEAKAGE CURRENT TESTER
AC 200mA/2/20/200/1000A

ϕ68

FEATURES
・Frequency Selector Switch
to eliminate the effect of harmonics.
・Peak hold function.
・Analogue output terminal.



Dimensions	250(L)×130(W)×50(D)mm
Weight	approx. 570g (batteries included)
Power Source	6F22 (9V)×1

CE

Safety Warnings

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use.
Failure to follow the safety rules can cause fire, trouble, electrical shock, etc.
Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

※ The contents of this catalogue may be subject to change without notice.

■ DISTRIBUTOR

KYORITSU ELECTRICAL INSTRUMENTS WORKS,LTD.
No. 5-20 Nakane 2-chome, Meguro-ku, Tokyo, 152-0031 Japan
Phone:81-3-3723-0131 Telex:0246-6703 Fax:81-3-3723-0152
Cable Address: "KYORITSU KEIKI" TOKYO
URL:http://www.kew-ltd.co.jp
E-mail:info@kew-ltd.co.jp
Factories:Uwajima & Ehime

02.08AD PRINTED IN JAPAN