
P 3/3 RE A-15 Modular Underground Switching Stations



Application

Underground switching stations are used wherever you want to localize a power point that will be used temporarily (places for organizing public events onto plazas, sports facilities, squares, etc.).
The system closed in the ground under the cover will be protected and will not interfere with other objects.

System description

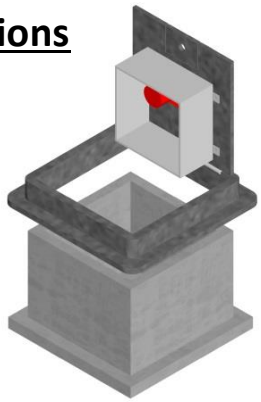


- Modular chamber body made of Polipit polymer blend.
- External dimension in mm: 310x310x310 mm.
- Cover made of SMC A-15 plastic with SMC plastic frame.
- Closed with stainless screws.
- Mechanically locked at opening.
- Tiltable flap that allows the cables to be exited when the cover is closed.
- Cover equipped with a diving bell.(180x180mm)

Electrical equipment is made according to specifications of ordering party.

* The switching station requires a drainage system to be installed.

Advantages of TP 5/5 RE B-125 Underground switching stations

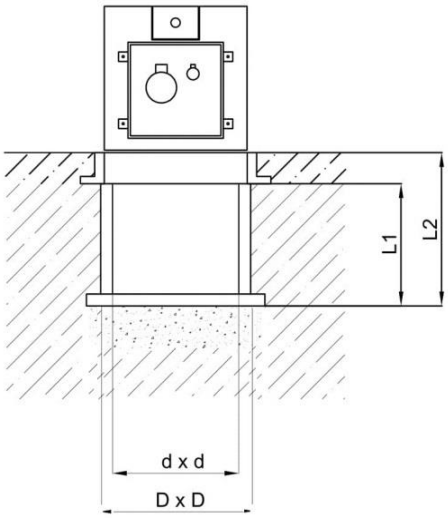

- Elimination of the damages resulting from vandalism, collision, etc.
- Reducing the negative impact of the atmosphere (rain, snow, low and high temperatures).
- Simple and fast installation thanks to the modular construction.
- The Polipit material is 100% resistant to frost, chemicals as well as aggressive media.
- The Polipit material is completely recyclable.

switchgear type	Dimensions external switchgear [mm]	Dimensions outer covers [mm]	Dimensions diving bell [mm]
A-15	D x D x L2	width x height x depth	width x height x depth
TP 3-3 RE	**315 x 315 x 330**	**400 x 400 x 75**	**185 x 185 x 155**

Innotechnika Sp. z o.o.
al. Zwycięstwa 96/98, 81-451 Gdynia
Tel. fax.58/573-55-66, biuro@innotechnika.pl, www.studzienki.eu