






EKM 2020

IEC 61439 - 2

16A / AC 400V / 50 Hz / IP44 / □

Short-circuit withstand capability : 6 kA



Type of inner subdivision: Form 1 / EMC - environments: 1

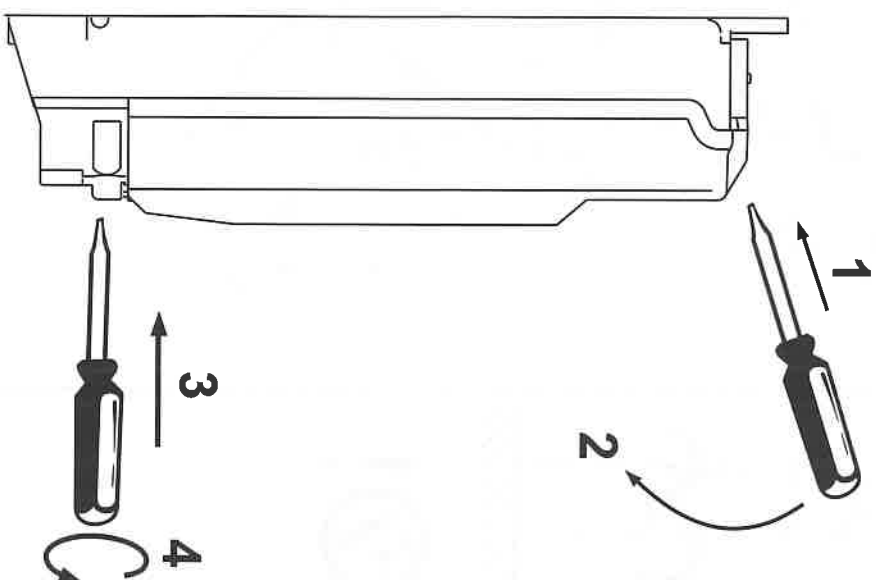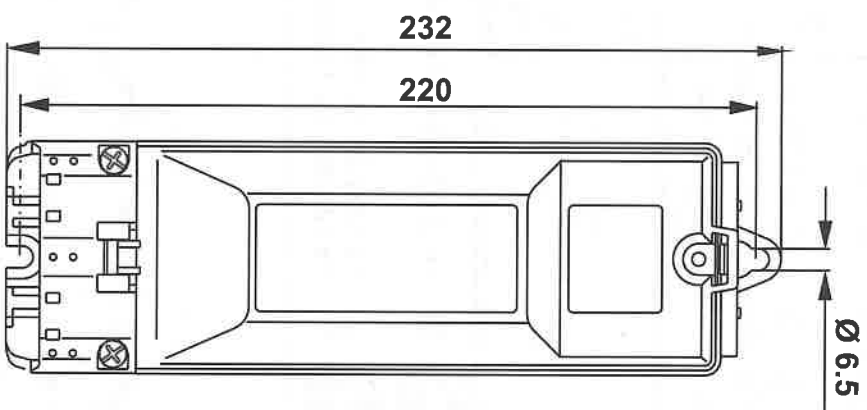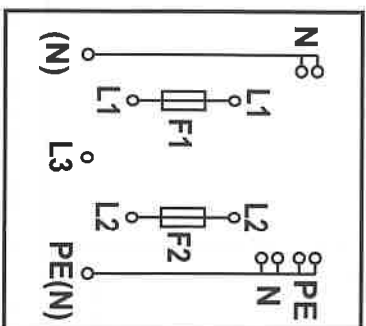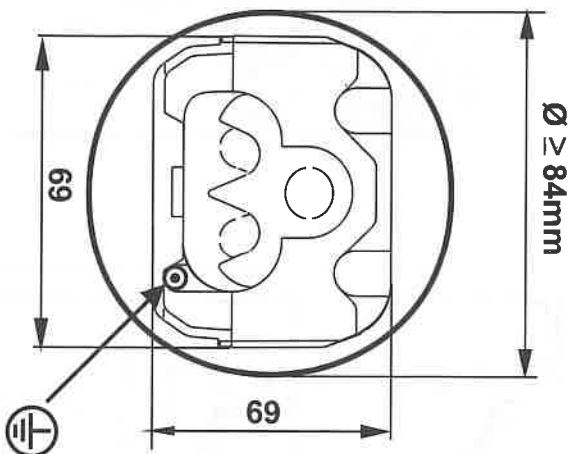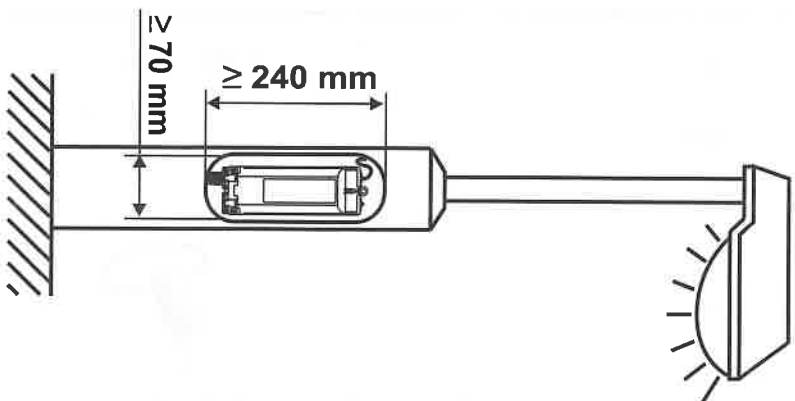

Tyco Electronics Raychem GmbH
a TE Connectivity Ltd. Company
Flinsinger Feld 1
85521 Ottobrunn/Munich, Germany
Tel: +49-89-6089-0
Fax: +49-89-6096-345
energy.te.com



TE
connectivity

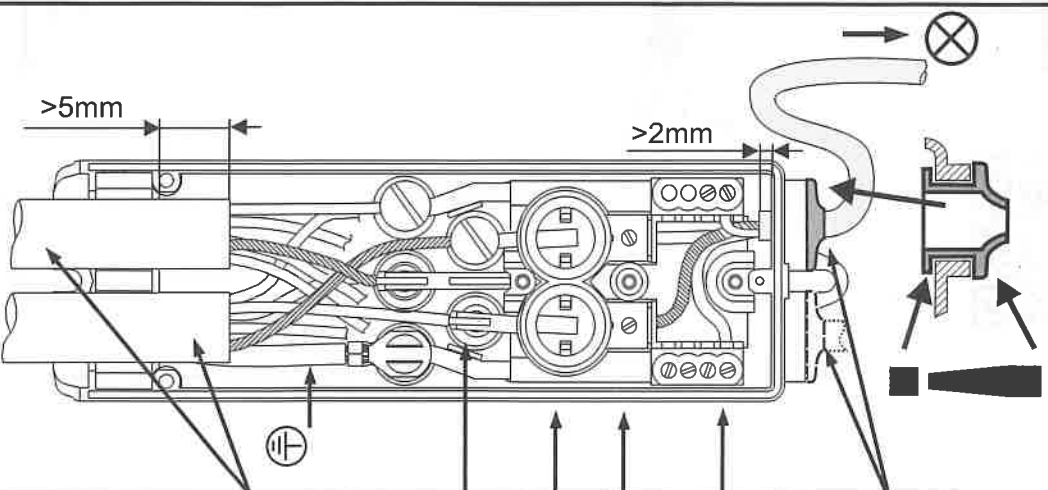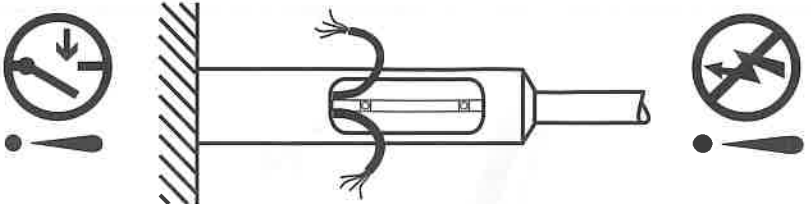

! 1x(2x) Ø 8 - 14mm	
Ⓟ Ⓝ Ⓟ ⌀ ≤ 2,5mm²	S=4mm (0,5 Nm)
Ⓛ1 Ⓛ2 ⌀ ≤ 2,5mm²	S=7..8mm (4 Nm)
2x D01 2 - 16A	
⌀ 1x (2x/3x) 5x6-16 mm² Cu/Al	
⌀ 1x (2x) 5x 10-16mm² Cu/Al 1x (2x/3x) 5x 10 mm² Cu/Al	
⌀12...24	⌀15...23
⌀12...24	⌀12...24

