
386170240050

Relay interface module (EMR or SSR) 0.1 - 2 - 3 - 5 - 6 - 8 - 16 A

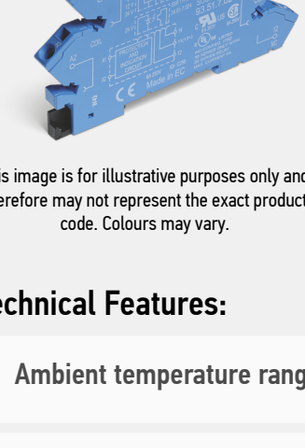

This image is for illustrative purposes only and therefore may not represent the exact product code. Colours may vary.

Technical description:
Relay interface modules, Electromechanical relay, with screwless terminal, 1 pole, CO (nPDT), 6 A, AgNi, DC sensitive coil, 24 V, operating from 19.2 to 28.8 V, rated power 0.3 W, consumption 10.4 mA, holding voltage 14.4 V, must drop-out voltage 1.2 V, option: DC, version: CO (nPDT), ambient temperature from -40 to +55 °C

BROWSE PRODUCT PAGE

Technical Features:

Ambient temperature range:	-40...55 °C
Commercial Description:	Electromechanical relay interface module with screwless terminals, 1 CO rated 6 A/250 V AC, 6.2 mm wide, 35 mm rail (EN 60715) mounting, for PLC or other systems.
Contact configuration:	1 pole, CO (nPDT)
Dimensions:	6.2x93.6x72.5 mm
Electrical life:	60000 cycles
Insulation coil/contacts:	6 kV
Nominal voltage DC:	24 V
Operating range DC:	19.2...28.8 V
Rated contact voltage:	250 V AC
Rated current (contacts):	6 A
Rated power DC:	0.3 W
Supply:	DC sensitive coil
Certifications and quality approvals (according to type):	

The information, technical details, data and features contained in this document are subject to change or modification at any time.
It is for information purposes only and does not form
the basis of a contract.

Need more information?
Contact our sales Find a dealer

Finder 2025 - All rights reserved
Findernet.com
Technical Information