A




95.05

Approvals (according to type):

Certain relay/socket combinations



095.01





060.48

Screw terminal (Box clamp) socket panel or 35 mm rail mount		**95.03 (blue)**	**95.03.0 (black)**	**95.05 (blue)**	**95.05.0 (black)**
For relay type		40.31		40.51, 40.52, 40.61, 40.62	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.01	095.01.0	095.01	095.01.0
8-way jumper link		095.18	095.18.0	095.18	095.18.0
Marker tag holder (for tags 060.48 type)		097.00			
Identification tag		095.00.4			
Modules (see table below)		99.02			
Timer modules (see table below)		86.30			
Sheet of marker tags for plastic retaining and release clip 095.01 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV			
Protection category		IP 20			
Ambient temperature	°C	–40…+70 (see diagram L95)			
Screw torque	Nm	0.5			
Wire strip length	mm	8			
Max. wire size for 95.03 and 95.05 sockets		solid wire		stranded wire	
	mm²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	


* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

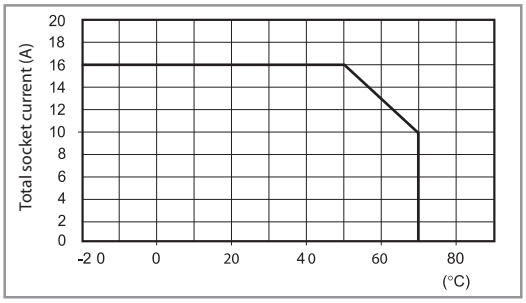





95.03




95.05





095.18

8-way jumper link for 95.03 and 95.05 sockets	095.18 (blue)	095.18.0 (black)
Rated values	10 A - 250 V	





86.30

86 series timer modules	
(12…24)V AC/DC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.0.024.0000
(110…125)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.120.0000
(230…240)V AC; Bi-function: AI, DI; (0.05 s…100 h)	86.30.8.240.0000

Approvals (according to type):



99.02

Approvals (according to type):

DC Modules with non-standard polarity (+A2) on request.

99.02 coil indication and EMC suppression modules for 95.03 and 95.05 sockets		
Diode (+A1, standard polarity)	(6…220)V DC	99.02.3.000.00
LED	(6…24)V DC/AC	99.02.0.024.59
LED	(28…60)V DC/AC	99.02.0.060.59
LED	(110…240)V DC/AC	99.02.0.230.59
LED + Diode (+A1, standard polarity)	(6…24)V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	(28…60)V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	(110…220)V DC	99.02.9.220.99
LED + Varistor	(6…24)V DC/AC	99.02.0.024.98
LED + Varistor	(28…60)V DC/AC	99.02.0.060.98
LED + Varistor	(110…240)V DC/AC	99.02.0.230.98
RC circuit	(6…24)V DC/AC	99.02.0.024.09
RC circuit	(28…60)V DC/AC	99.02.0.060.09
RC circuit	(110…240)V DC/AC	99.02.0.230.09
Residual current by-pass*	(110…240)V AC	99.02.8.230.07

* Additional 0.9 W power dissipation

X-2021, www.findernet.com