Digital temperature transmitter T38

Modelcode type: T38

Item number: 14603861

Digital temperature transmitter T38 with HART-protocol	
Design	Head
Other approvals / certificates	Without
SIL-Statement	suitable for SIL applications (up to SIL2, SIL3 redundant)
HART revision	HART® 7
Permissible ambient temperature transmitter	Standard -40...85°C
Configuration	Basic configuration (Pt100, 3-wire, 0 ... 150 °C, signaling down scale 3,5 mA)
Sensor Configuration	Sensor 1, sensor 2 not available
Configuration sensor	Pt100
Input configuration	3-wire
Drift Detection / Difference	not active
Unit	°C
Measuring range start value - sign	Plus (incl. 0)
Measuring range start value	0
Measuring range end value - sign	Plus (incl. 0)
Measuring range end value	150
Transmitter Signalling of error	Down scale (basically for all kinds of errors)
Current value for signalling down scale	3,5 mA (NAMUR down scale)
Current value for signalling up scale	21,5 mA (NAMUR up scale)
Signaling if ambient temperature is out of range	Down scale
Number of Operation Instructions	1 pcs. per packaging unit

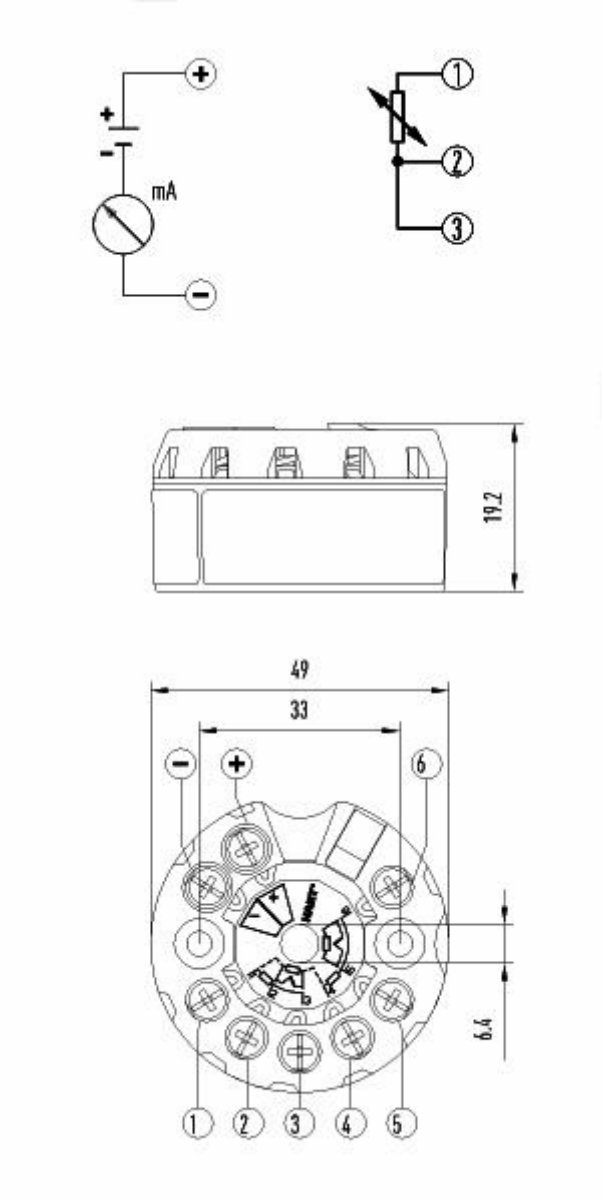

© Copyright by WIKA: Reproduction of this document is prohibited

WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Str. 30
63911 Klingenberg
Germany

Phone: +49 9372 132/0
Fax Inland: +49 9372 132/406
E-Mail: info@wika.de
Internet: www.wika.de

Digital temperature transmitter T38
Modelcode type: T38
Item number: 14603861

Type of packaging	Standard packaging – head transmitter (6 pcs per unit) (6x OI)
customer logo beginning with	WI

© Copyright by WIKA: Reproduction of this document is prohibited

WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Str. 30
63911 Klingenberg
Germany

Phone: +49 9372 132/0
Fax Inland: +49 9372 132/406
E-Mail: info@wika.de
Internet: www.wika.de