MURR ELEKTRONIK
stay connected

Mico Pro Potential distributor 2 x 12

Multipliing one channel 11-times , max 20 A

Mico Pro® PD 2× 12
1 channel (× 11)
Build your own Mico Pro® online:
https://micopro.murrelektronik.com

Link to Product

Illustration



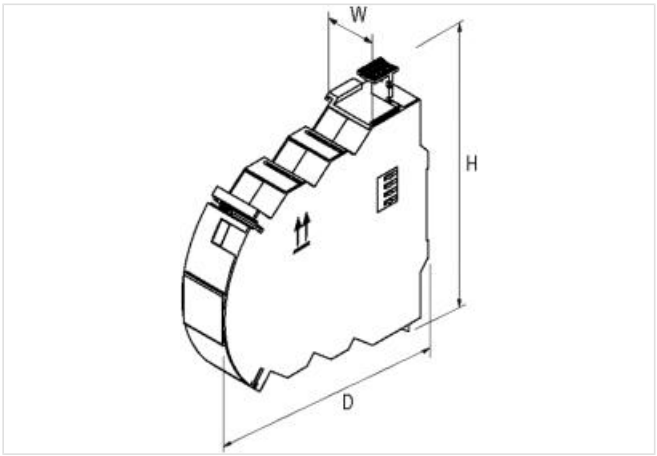

Product may differ from Image

General data	
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions H×W×D	130×24×114 mm
Bridging concept	Bridge set (max. 40 A)
Input	
Operating voltage	12 V DC; 24 V DC
Total current	max. 20 A
Connections (IN)	
Connection	Bridge system
Connections (OUT)	
Cross section (flex)	0.2...2.5 mm² (AWG 24...14)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.2...2.5 mm² (AWG 24...14)
Product article number of manufacturer	9000-41000-0000212

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-02-09