PRODUCT CARD
18.12.2025

Product data

Product code	**VG03-0007**	STK-code	**1912093**	EAN-code	**6410019120936**
Product name	OJL-connector 400 C			ETIM class	**EC000276**
Wires	1xAl/Cu 95-240/ 3xCu(6-50 mm^2)/ 4xCu(2,5-35mm^2)				

Technical data


Nominal current (IEC)	Cu	**600**	A
	Al	**380**	A
Nominal voltage (IEC)		**1000 V AC / 1500 V DC**	
		-	
		-	
		-	
Number of poles		**1**	pcs
Max. Cross section		**240mm^2 (500 kcmil)**	mm^2
Tightening torque			
	2,5-35 mm^2 (14-2 AWG)	**6**	Nm
	6-50 mm^2 (10-1 AWG)	**10**	Nm
	95-240 mm^2 (3/0-500 kcmil)	**25**	Nm
		-	
Input		**1x Al/Cu (95-240 mm^2)**	
Output		**3x Cu (6-50 mm^2) / 4xCu (2,5-35mm^2)**	
		-	
Operating temperature		**80**	°C
Weight		**250**	g
IP-protection		**IP20**	
Standards		**EN 61238-1:2003; EN 60947-7-1:2009**	
Color / Material		**Grey Cover, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium**	
Mounting / Connection		**DIN-rail and screw mounting (4xM5)**	



Description

Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 7 output cables.

Drawing

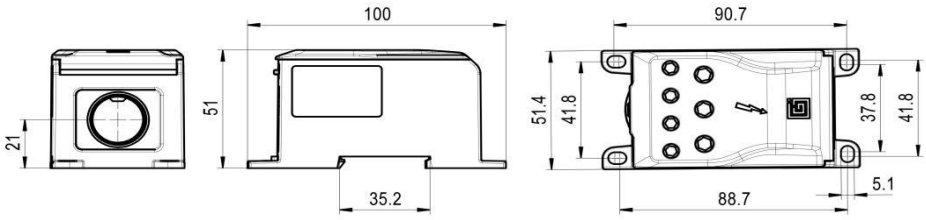

Package

Package	**Box**	Pcs / Package	**8**	Weight [kg]	**2,10**
Length [mm]	**205**	Width [mm]	**180**	Height [mm]	**135**

Ouneva Oy
Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi