

UGEAV

snap-in ladder set for stainless steel unit, triple, angular

installation frame for installation into a floor box or levelling unit, retainer for up to three mounting boxes

material	sheet steel, hot-dip galvanized
type of assembly	screw fastening at the levelling device UNE's frame
application area	quadrangular high-grade steel cartridges with cable resp. tube outlet
norm	according to DIN EN 50085
permits	according to VDE / TÜV

Continously hot galvanized (Sendzimir process) (DIN EN 10346)

Product	H	B	lock-in range	mounting box	G
UGEAV-50S	50 mm	186 mm	25 mm	triple UG	0,24 kg
UGEAV-80S	76,5 mm	186 mm	40 mm	triple UG	0,38 kg

H: height
B: width
lock-in range:
mounting box: Maximum number of installable device casings.
G: weight

DETAILS / APPLICATIONS

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 20.02.2023. Errors and technical modifications reserved.

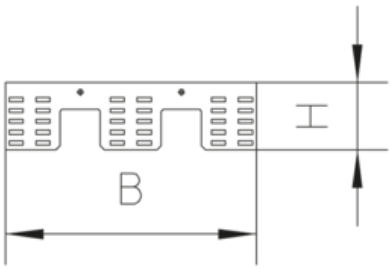

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

Date of issuance: 20.02.2023. Errors and technical modifications reserved.