KNIPEX NexStrip®

Multi-Tool for Electricians

Wire stripper with three functions: stripping wire up to 10 mm², crimping capacity of 4 mm² or 2 x 2.5 mm² and cutting capacity of 10 mm²

- Precise stripping: automatically adapts to the respective cable diameter and ensures consistent stripping lengths with the adjustable length stop especially with repetitive work
- Perfect crimping: fast and even square crimping for individual wire ferrules, the ratchet crimping mechanism guarantees the required crimping pressure
- Multi-component grips ensure non-slip, comfortable handling

> Quick, precise square crimp of single wire ferrules according to DIN 46228 parts 1+4, self-adjusts for sizes 0.25 – 4 mm² / 2 x 2.5 mm² – allows for quick crimping between different sizes
> Repetitive, high crimping quality due to ratcheting mechanism with a complete crimping cycle
> Stripping with fine adjustment – for optimal adjustment to special materials or temperature conditions for flexible and solid conductors between 0.03 and 10 mm² (AWG 32 – 8)
> Cleanly cuts conductors up to 10 mm² (AWG 8)
> High-quality housing made of glass fibre reinforced plastic
> For the electrical trade: for domestic installations and wiring of electronical devices, such as PLC (programmable logic controller)



12 72 190





The ratchet crimping mechanism ensures the correct crimping pressure.



2 x 2,5 mm² 4 mm²

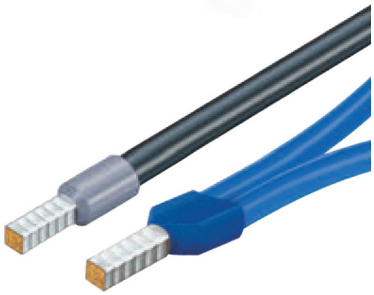

2,5 mm² 0,5 mm² 0,25 mm²



With cable cutter for conductors up to 10 mm².



Automatic stripping up to 10 mm².



Square crimping die for wire ferrules of 0.25 – 4 mm².



The fine adjustment feature allows reliable stripping in all operating conditions like extreme temperatures or special insulating material.

Article no.	EAN 4003773-	↔ mm	Handles	Application	Capacity mm²	AWG	⚖ g
12 72 190	088165	190	non-slip	Cutting	Cutting up to 10	8	170
				Stripping	Stripping from 0.03 to 10	32 – 8	
				Square compression	Crimping of single wire ferrules from 0.25 to 4 Crimping of twin wire ferrules 2 x 2,5		

12 49 21	057581	Spare blades block for 12 72 190	8
12 49 23	057604	Spare length stop for 12 72 190	46