

4x

Stopień ochrony IP65 zachowany jedynie po zaślepieniu otworów montażowych.


IP65 protection class preserved only after closing the mounting holes

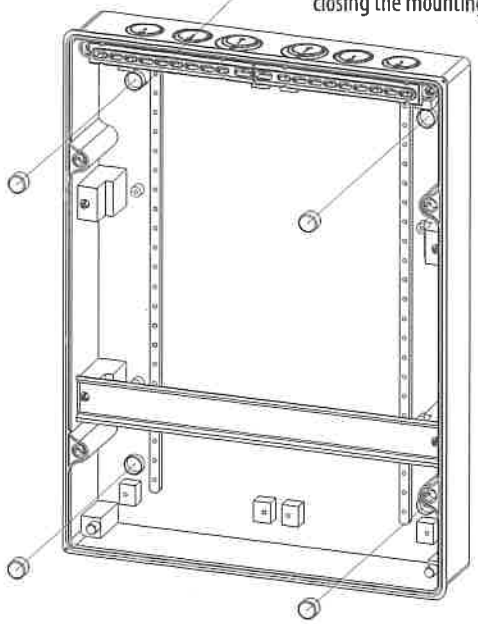


4x

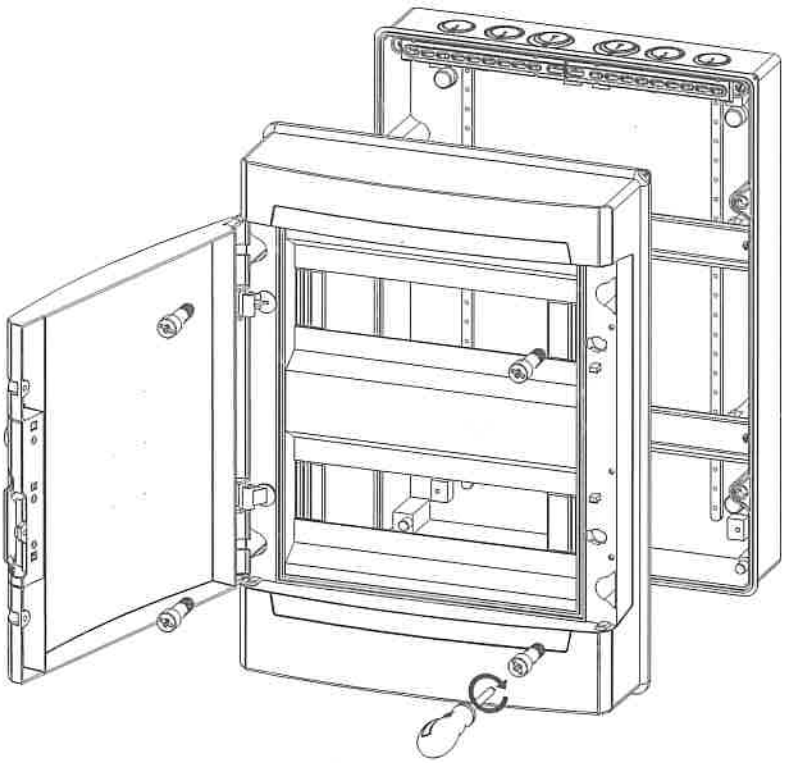

Wkręt/Screw Ø 3,9x13 -

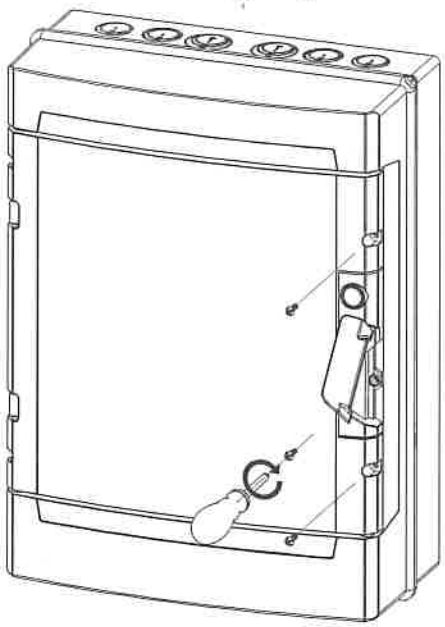

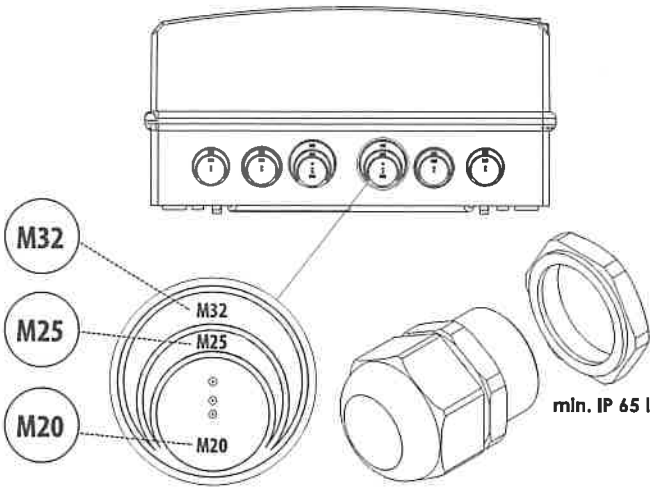


**Stopień ochrony IP65 wymaga montażu wkręta dociskającego drzwi:**

| | |
|---|---|
| 1960-XX 1961-XX 1954-XX 1956-XX | 1x wkręt 3,9x13(pod klamką) |
| 1955-XX | 3x wkręt 3,9x13 (zgodnie z rysunkiem) |

**IP65 degree of protection requires the installation of a door pressure screw:**

| | |
|---|---|
| 1960-XX 1961-XX 1954-XX 1956-XX | 1x screw 3,9x13(under the handle) |
| 1955-XX | 3x screws 3,9x13 (according to the drawing) |

S2208-1

EP-LUX+

**ELEKTRO-PLAST TADEUSZ CZACHOROWSKI SPÓŁKA JAWNA**
ul.Płońska 18, 05-190 Nasielsk
POLAND
www.elektro-plast.com.pl
tel. +48 (23) 69 33 900
fax +48 (23) 69 33 902
e-mail: info@elektro-plast.com.pl


**ELEKTRO-PLAST**
NASIELSK

# IP 65 1500V DC 1000V AC
# PN-EN 62208-2011 PV READY


Transparent door

## 1500V DC 1000V AC


| 1/6 | 1/8 | 1/12 | 1/18 | 2/24 | 2/36 | 3/36 | 3/54 |
|---|---|---|---|---|---|---|---|
| 1960-01 | 1961-01 | 1954-01 | 1955-01 | 1956-01 | 1962-01 | 1958-01 | 1959-01 |

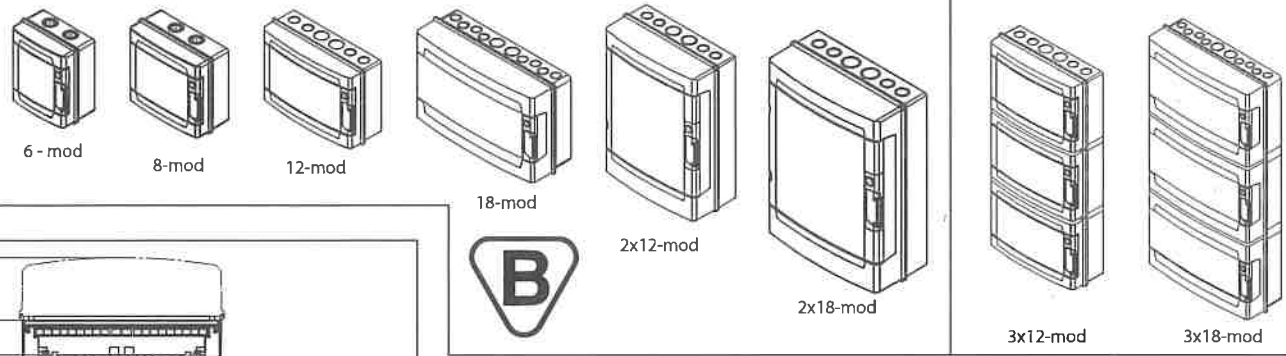

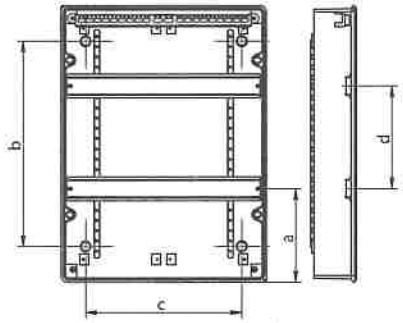

| [mm] | 1/6 | 1/8 | 1/12 | 1/18 | 2/24 | 2/36 | 3/36 | 3/54 |
|---|---|---|---|---|---|---|---|---|
| a | 107 | 107 | 107 | 131 | 129 | 130 | 106 | 130 |
| b | 130 | 130 | 140 | 190 | 288 | 280 | 574 | 716 |
| c | 136 | 190 | 260 | 340 | 230 | 270 | 260 | 340 |
| d | - | - | - | - | 150 | 172 | 215 | 262 |
| e | 45 | 42 | 55 | 50 | 55 | 55 | 55 | 50 |
| f | 51 | 51 | 55 | 90 | 88 | 90 | 55 | 90 |

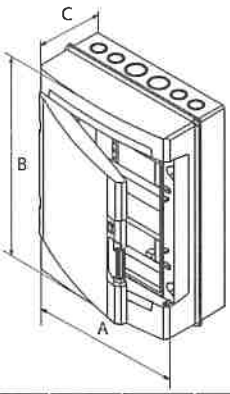

| [mm] | 1/6 | 1/8 | 1/12 | 1/18 | 2/24 | 2/36 | 3/36 | 3/54 |
|---|---|---|---|---|---|---|---|---|
| A | 185 | 239 | 303 | 410 | 304 | 410 | 303 | 410 |
| B | 215 | 215 | 214 | 262 | 408 | 430 | 646 | 786 |
| C | 113 | 113 | 118 | 150 | 149 | 151 | 118 | 150 |


## IP65


PL

Deklarowany przez producenta stopień ochrony IP, pozostaje zachowany w przypadku zastosowania przez użytkownika akcesoriów (np. dławnic) o stopniu ochrony co najmniej równym deklarowanemu, oraz przeprowadzeniu montażu montażu zgodnie ze sztuką oraz instrukcjami towarzyszącymi.

EN

The IP degree of protection declared by the manufacturer is maintained if the user uses accessories (e.g. glands) with a degree of protection at least equal to the declared one and performs the installation in accordance with the art and accompanying instructions.

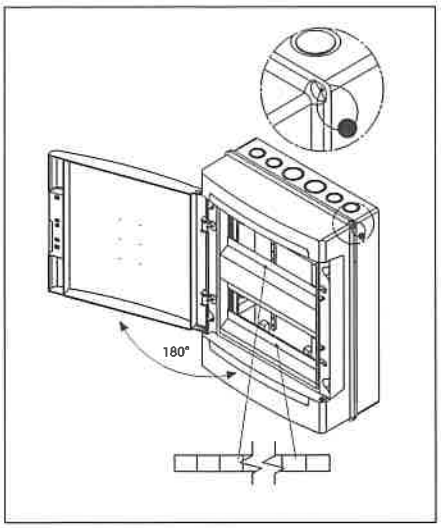

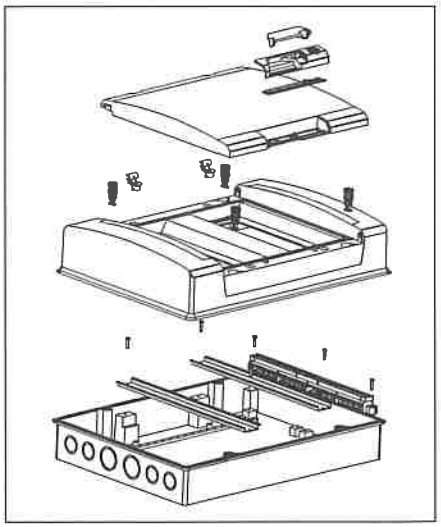S2208-1

EP-LUX+

**ELEKTRO-PLAST TADEUSZ CZACHOROWSKI SPÓŁKA JAWNA**
ul.Płońska 18, 05-190 Nasielsk
POLAND
www.elektro-plast.com.pl
tel. +48 (23) 69 33 900
fax +48 (23) 69 33 902
e-mail: info@elektro-plast.com.pl