

RockFaster

+ FAST + PRECISE + RESISTANT

Reinforced concrete has
never been so soft



ITEM DESIGNED FOR INTENSIVE APPLICATIONS.

With its 100% carbide insert and a number of cutting edges adapting to drilling diameters, RockFaster ensures maximum destruction of reinforced concrete in minimum time. It's also precise, producing perfectly cylindrical, calibrated holes with no cracks in the concrete, so your anchors will hold in place for as long as possible. Ideal for making holes for all types of fixings, pipes and cables...




SDS-PLUS COMPATIBILITY

110 TO 1000 mm
LENGTH



A SCALABLE NUMBER OF CUTTING EDGES

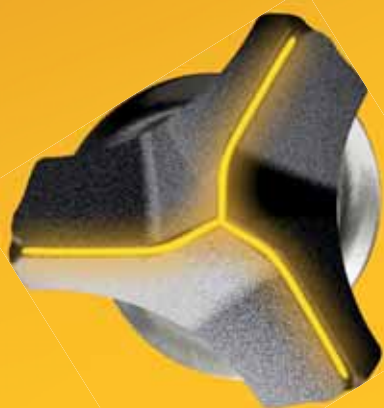

RockFaster

3 CUTTING
edges for optimised dust
evacuation



Peripheral areas

FROM Ø5 TO Ø7

3 cutting edges for Ø5 to 7 mm because it requires less effort in terms of power and number of cutting edges. It is also necessary not to overload the insert at an angle on these small diameters afin not compress the dust and ensure that the dust is evacuated evacuation.

“PASSES THROUGH CONCRETE
REINFORCING BARS WITH EASE”

Christophe Salin AD SARL salina Jura solar energy



**SPECIAL
REINFORCED
CONCRETE**

THICK LISTEL

for greater resistance
to wear and vibration.

WIDE GROOVE


for better dust evacuation
and optimum ventilation
to prevent overheating.



**TRIPLE U-SHAPED
FLUTE**

**SOLID ONE-PIECE
CARBIDE HEAD**

**PERFECTLY ADAPTED TO EVERY
DRILLING DIAMETER !**

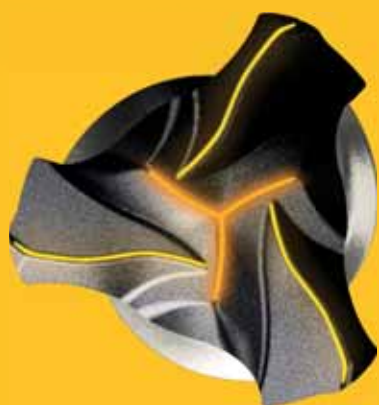

RockFaster+

6 CUTTING

edges for optimum destruction
of concrete in minimum time



Central areas

FROM 8 TO Ø20

3 central cutters with a 130°
angle start the hole and guarantee
centring and penetration.

3 peripheral cutters at 145°
take over and complete the work with a
concrete-breaking effect.


Optimum distribution of the 6 cutting edges
for better better distribution of force, ensuring
uniform wear of the cutting edges and longer
service life. The combination of these 6 cutting
edges ensures maximum of concrete in the
shortest possible time.

Ref.
118**Rockfaster** **RockFaster**

Hammer drill bit 3 and 6 cutting edges

Compatible SDS-plus

A 100% carbide insert with a variable number of cutting edges to suit different drilling diameters, ensuring maximum destruction of reinforced concrete in minimum time. It is also extremely precise, producing perfectly cylindrical and calibrated holes without cracking the concrete, ensuring maximum hold for your anchors. Its triple flute with U-shaped design ensures rapid drilling thanks to optimised dust evacuation.

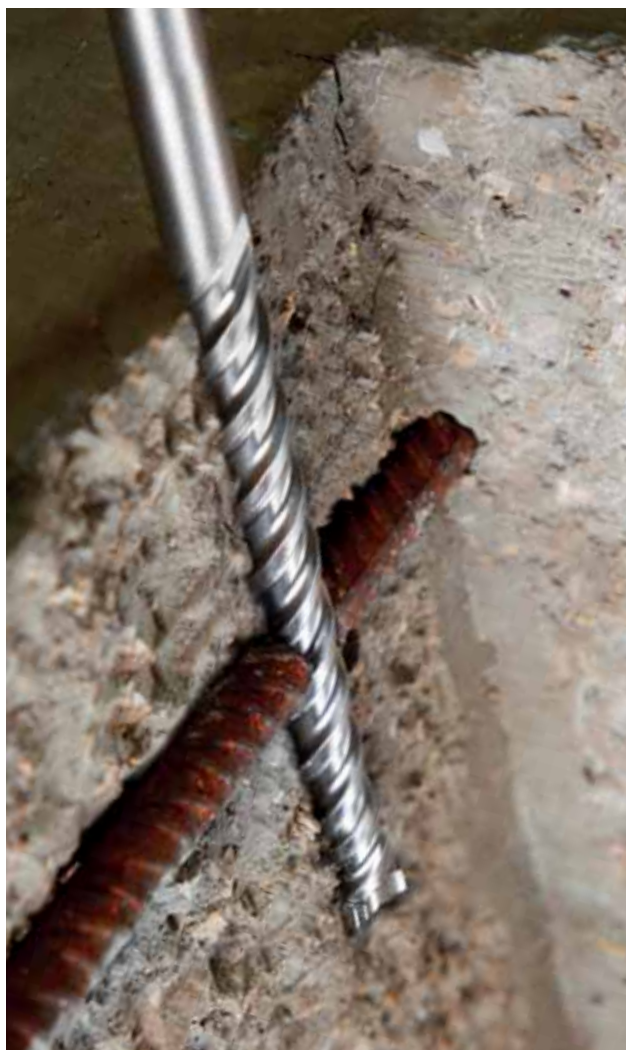

- SCALABLE NUMBER OF CUTTING EDGES
- DRILL THROUGH REINFORCED CONCRETE

Features

- Solid one-piece 100% carbide head.
- 3 cutting edges for $\varnothing 5$ to 7 and 6 cutting edges for $\varnothing 8$ to 20.
- Triple U-shaped flute.
- Wide groove.
- Thick listel.

Benefits

- High wear resistance of the head.
- The number of cutting edges varies according to drill diameter, guaranteeing the most efficient head geometry according to drill diameter.
- Slip-free priming and stable drilling for greater ease of use.

- Fast drilling with optimised dust extraction.

Applications

- Hole for all types of fixing and cable routing.



Reinforced concrete, Concrete, Stone, Brick

Shank

Hammer drill

Compatible
SDS-plus

< 5 KG

VIDEO DEMO



VIDEO TUTO

ALL
SETS
PAGES 94-95

1002A



1003A



1004A



1005A

Ø	WI	TI	Ref.	Gencod	Qty
L 50 x 110					
5	50	110	118D05L0110	3336600213920	1
6	50	110	118D06L0110	3336600213982	1
8	50	110	118D08L0110	3336600214057	1
10	50	110	118D10L0110	3336600214132	1
L 100 x 160					
5	100	160	118D05L0160	3336600213937	1
6	100	160	118D06L0160	3336600213999	1
6,5	100	160	118D06.5L0160	3336600213944	1
7	100	160	118D07L0160	3336600214033	1
8	100	160	118D08L0160	3336600214064	1
10	100	160	118D10L0160	3336600214149	1
12	100	160	118D12L0160	3336600214217	1
14	100	160	118D14L0160	3336600214286	1
16	100	160	118D16L0160	3336600214385	1
L 150 x 210					
6	150	210	118D06L0210	3336600214002	1
6,5	150	210	118D06.5L0210	3336600213951	1
7	150	210	118D07L0210	3336600214040	1
8	150	210	118D08L0210	3336600214071	1
10	150	210	118D10L0210	3336600214156	1
12	150	210	118D12L0210	3336600214224	1
14	150	210	118D14L0210	3336600214293	1
15	150	210	118D15L0210	3336600214361	1
16	150	210	118D16L0210	3336600214392	1
18	150	210	118D18L0210	3336600214453	1
20	150	210	118D20L0210	3336600214514	1
L 200 x 260					
6	200	260	118D06L0260	3336600214019	1
6,5	200	260	118D06.5L0260	3336600213968	1
8	200	260	118D08L0260	3336600214088	1
10	200	260	118D10L0260	3336600214163	1
12	200	260	118D12L0260	3336600214231	1
14	200	260	118D14L0260	3336600214309	1
16	200	260	118D16L0260	3336600214408	1
18	200	260	118D18L0260	3336600214460	1
20	200	260	118D20L0260	3336600214521	1



Black plastic clip

Ø	WI	TI	Ref.	Gencod	Qty
L 250 x 310					
6	250	310	118D06L0310	3336600214026	1
6,5	250	310	118D06.5L0310	3336600213975	1
8	250	310	118D08L0310	3336600214095	1
10	250	310	118D10L0310	3336600214170	1
12	250	310	118D12L0310	3336600214248	1
14	250	310	118D14L0310	3336600214316	1
15	250	310	118D15L0310	3336600214378	1
16	250	310	118D16L0310	3336600214415	1
18	250	310	118D18L0310	3336600214477	1
20	250	310	118D20L0310	3336600214538	1
L 400 x 460					
8	400	460	118D08L0460	3336600214101	1
10	400	460	118D10L0460	3336600214187	1
12	400	460	118D12L0460	3336600214255	1
14	400	460	118D14L0460	3336600214323	1
16	400	460	118D16L0460	3336600214422	1
18	400	460	118D18L0460	3336600214484	1
20	400	460	118D20L0460	3336600214545	1
L 550 x 610					
8	550	610	118D08L0610	3336600214118	1
10	550	610	118D10L0610	3336600214194	1
12	550	610	118D12L0610	3336600214262	1
14	550	610	118D14L0610	3336600214330	1
16	550	610	118D16L0610	3336600214439	1
18	550	610	118D18L0610	3336600214491	1
20	550	610	118D20L0610	3336600214552	1
L 940 x 1000					
8	940	1000	118D08L1000	3336600214125	1
10	940	1000	118D10L1000	3336600214200	1
12	940	1000	118D12L1000	3336600214279	1
14	940	1000	118D14L1000	3336600214347	1
16	940	1000	118D16L1000	3336600214446	1
18	940	1000	118D18L1000	3336600214507	1
20	940	1000	118D20L1000	3336600214569	1



Kakemono

Ref. M00213

PSI documentation holder

Height 1M70 - Ref. C00127

Display 48 pieces

Ref. C00125



Features	Ref.	Gencod
KAKEMONO ROCKFASTER	M00213	3336600219014
PSA COUNTER ROCKFASTER 48PCS	C00125	3336609012746
PSI ROCKFASTER H170CM + DOC REF D00396 (NOT INCLUDED)	C00127	3336609012760