quadrix


The rugged hand-held with valuable features

Top features:

- Frequency management
- radiomatic® report
- radiomatic® infrakey
- HBC Safety Features
- … and much more



Quality in Control.

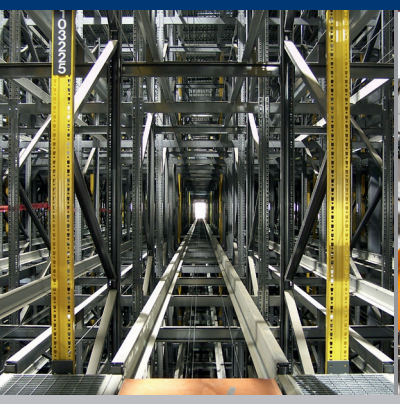







HBC radiomatic

www.hbc-radiomatic.com

quadrix


Highlights:



radiomatic® iLOG
This clever electronic key enables the quick activation of a spare transmitter if the original transmitter is damaged. This means service without expensive downtime.



Frequency management (optional)
An automated frequency management via Adaptive Frequency Hopping or DECT ensures interruption-free radio operation without frequency conflicts.



radiomatic® infrakey (optional)
With this option, an infrared connection between the transmitter and the receiver is necessary to switch on the system. This protects the operator from unintended crane / machine movements.



HBC Safety Features (optional)
In emergencies, radiomatic® shock-off / roll-detect / zero-g / inclination switch can trigger an automatic shutdown of the control and thus ensure additional safety.



radiomatic® report (optional)
This feature protects the control from unauthorized use. It enables the blocking of safety-relevant functions for non-authorized personnel as well as the storage of useful operational data.

Carrying methods:



Belt clip.



Option:
carrying bag.

Applications:

Diverse cranes, lift equipment and machinery.



Version with trolley preselection.



Version with LED feedback.

Further details:

- 8 two-step HBC push buttons / STOP impact switch.
- LED for indication of operating / battery status.
- Rechargeable NiMH exchange battery, approx. 30 h of continuous operating time (standard version).
- Robust plastic housing, protection class IP 65.
- Weight: 360 g (0.8 lb.) including battery.
- Integrated all-around rubber shock absorber.
- Further options: radiomatic® AFS (Automatic Frequency Selection), combined operation, feedback by LED, preselection of trolley / hoist via push button (indication of selection status via LEDs).

HBC-radiomatic GmbH • Haller Strasse 45 – 53 • 74564 Crailsheim • Germany
Phone +49 7951 393-0 • Fax +49 7951 393-50 • info@radiomatic.com

© 2021 HBC-radiomatic GmbH | PI_quadrix | 44/21 | Specifications and design subject to change without notice! No part of this document may be reproduced in any manner whatsoever without the expressed written permission of HBC-radiomatic GmbH.