**PRODUCT CARD**
18.12.2025

## Product data

| | | | | | |
|---|---|---|---|---|---|
| Product code | **VG03-0006** | STK-code | **1912009** | EAN-code | **6410019120097** |
| Product name | OJL-connector 200 | | | ETIM class | **EC000276** |
| Wires | 1xAl/Cu (10-70mm²)/ 6x(2,5-16mm²) | | | | |

## Technical data


| | | | |
|---|---|---|---|
| Nominal current (IEC) | Cu | **200** | A |
| | Al | **160** | A |
| Nominal voltage (IEC) | | **1000 V AC / 1500 V DC** | |
| | | **-** | |
| | | **-** | |
| | | **-** | |
| Number of poles | | **1** | pcs |
| Max. Cross section | | **70 mm² (2/0 AWG)** | mm² |
| Tightening torque | | | |
| | 50-70 mm² (1/0-2/0 AWG) | **10** | Nm |
| | 25-35 mm² (4-2 AWG) | **6** | Nm |
| | 2,5-16 mm² (14-6 AWG) | **3** | Nm |
| | | **-** | |
| Input | | **1x Al/Cu (10-70mm²)** | |
| Output | | **6x Cu (2,5-16mm²)** | |
| | | **-** | |
| Operating temperature | | **80** | °C |
| Weight | | **84** | g |
| IP-protection | | **IP20** | |
| Standards | | **EN 61238-1:2003; EN 60947-7-1:2009** | |
| Color / Material | | **Grey Cover, Grey Housing RAL 7035 PA66/V0, Connector part tin plated aluminium** | |
| Mounting / Connection | | **DIN-rail and screw mounting (2xM5)** | |



## Description

Single pole distribution block for branching connections. The OJL distribution block is compact and distributes the current through 6 output cables.

## Drawing

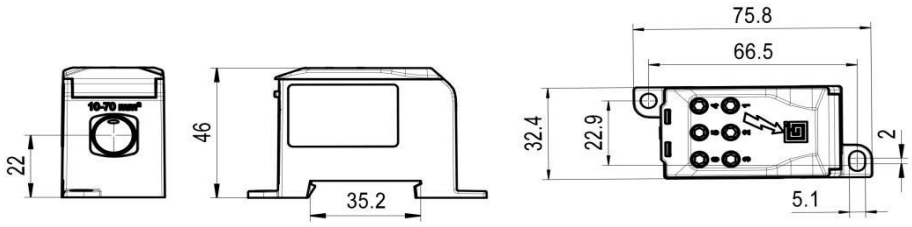


## Package

| | | | | | |
|---|---|---|---|---|---|
| Package | **Box** | Pcs / Package | **30** | Weight [kg] | **2,70** |
| Length [mm] | **205** | Width [mm] | **180** | Height [mm] | **135** |

**Ouneva Oy**
Teollisuustie 21
FI-82730 Tuupovaara
Finland

www.ounevagroup.fi
www.ounevaproducts.fi