Installation Instructions | Primo Libero 1

Instrucciones de instalación, Instructions d'installation, Installationsanleitung, إرشادات التركيب ,
Installatie-instructies, Instruções de instalação, Installatie-instructies,
設置手順説明, Οδηγίες εγκατάστασης





Master Translations QR Link

UK CA CE ST POLY

Safety notes:

Installation must be performed only by a qualified electrician.

Make sure that the fixture is disconnected from the AC supply.

This luminaire is to be installed in 4-wires/3-phases or 6-wires/3-phases DALI track rails.

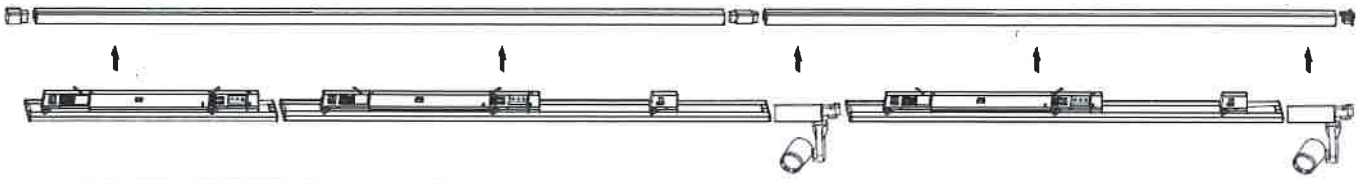

Features:

Perfect solution for the retail business, shops, and supermarkets.
Excellent quality with high efficiency up to 160lm/W.
Four selectable powers with DIP switch.
Flexible position of the luminaire in the rail by sliding left or right.



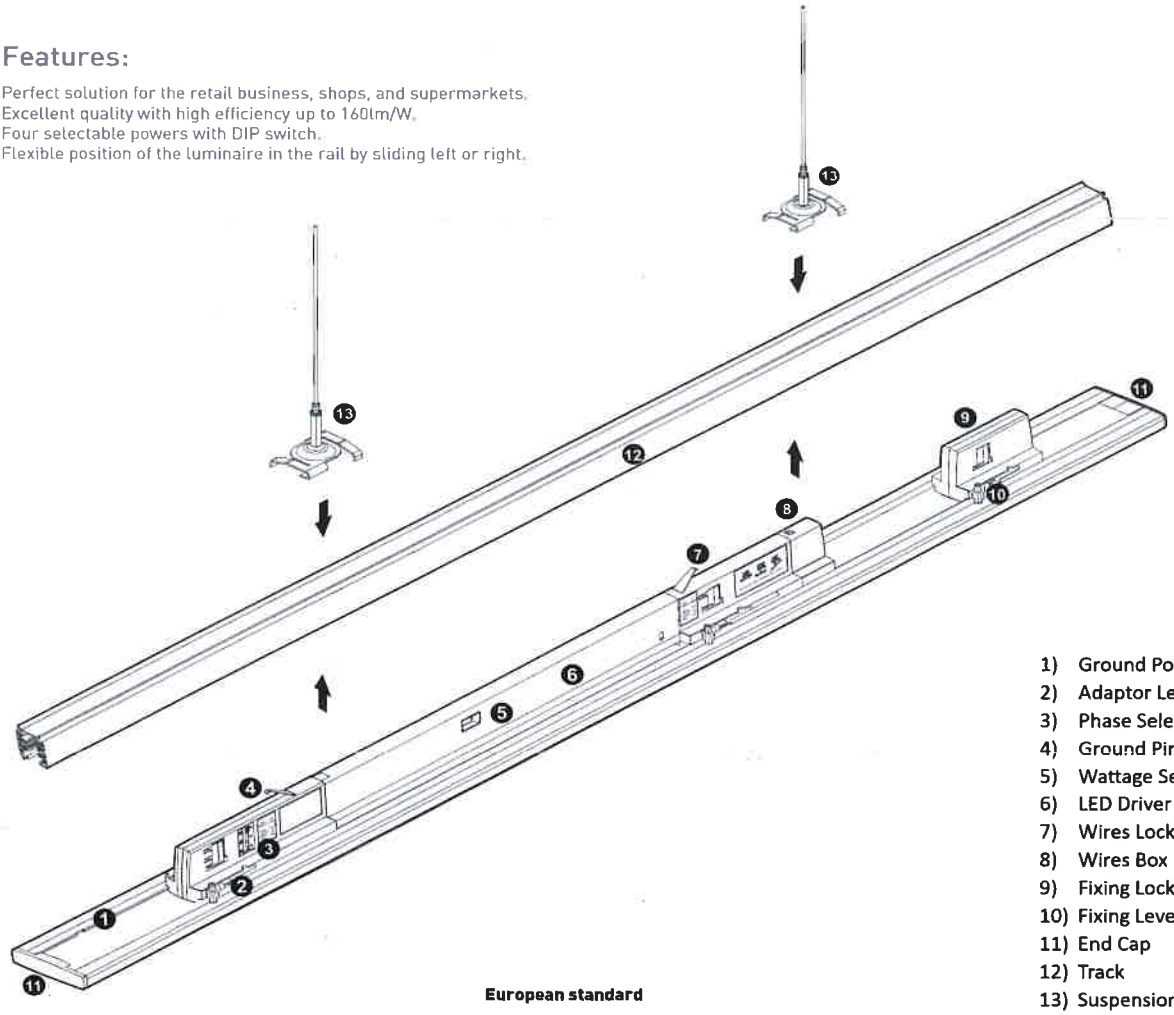

European standard

1) Ground Point
2) Adaptor Lever
3) Phase Selector
4) Ground Pin
5) Wattage Selector
6) LED Driver
7) Wires Lock
8) Wires Box
9) Fixing Lock
10) Fixing Lever
11) End Cap
12) Track
13) Suspension Kit

Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD
Warrington Tel: +44 (0)1942 433333

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ
Belfast Tel: +44 (0)2890 773750

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56
International Tel: +44 (0)1942 433343

www.ansell-lighting.com

Spain Tel: 00 34 938 005642

Issue Number: [1]

Step 1

Set the power in the 5 **power selector** DIP switch.

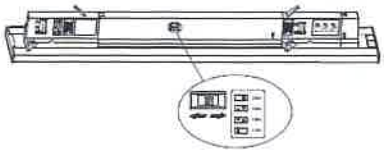

Step 2

Choose the phase/circuit in the 3 **phase selector** DIP switch.

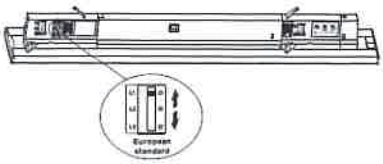

Step 3

Insert the T-line luminaire into the 12 **track rail** with the correct direction.

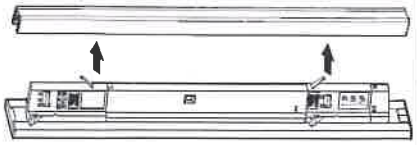

Step 4

Lock the luminaire with the 2 **adaptor knob** and the 10 **fixing knob** by rotating the knobs clockwise.



How to avoid the track rail joints during installation



Type A



Type B

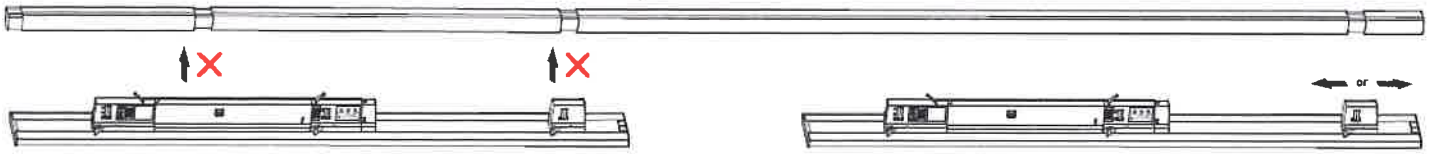

If the 12 **track rail** joint interferes with the position of the 9 **Fixing lock**, follow the instruction of Step 1.

If the 12 **track rail** joint interferes with the position of the 6 **LED driver**, follow the instructions from Step 2 to Step 3.

Step 1

Slide the 9 **fixing lock** left or right to a free position

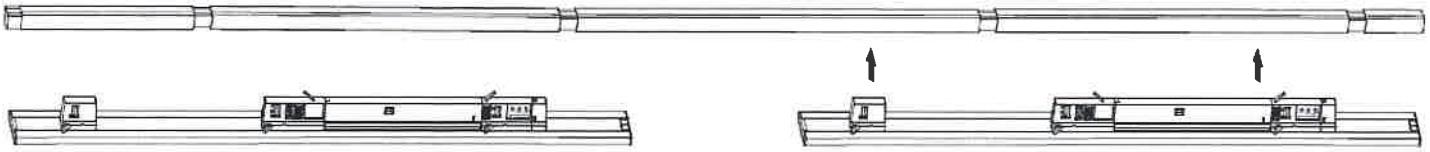

Step 2

If the 12 **track rail** joint interferes with the position of the 6 **LED driver** of Type A, then use type B instead

Step 3

Install the T-line luminaire into the 12 **track rail**

Track rail

4-wires/3-phases
6-wires/3-phases



- L1 L1 as a phase
- L2 L2 as a phase
- L3 L3 as a phase
- N Neutral Conductor
- D/L Positive of DALI input
- D/N Negative of DALI input
- 1 Positioning Knob

Recommend track rail brands

Pay attention to the positioning knob. No Reverse Mount!
Improper installation may cause irreparable damage.



Global



Stucchi



Unipro



Eutrac



Staff



Ivela



Ansell Electrical Products
Unit 6B, Stonecross Industrial Park,
Yew Tree Way,
Warrington,
WA3 3JD
Warrington Tel: +44 (0)1942 433333

Ansell (Sales & Distribution)
Unit 2, M2 Business Park,
Duncrue Street,
Belfast,
BT3 9AQ
Belfast Tel: +44 (0)2890 773750

Ansell (Sales & Distribution) Republic of Ireland Limited
Unit G1, Block G,
Calmount Park, Calmount Avenue
Dublin 12,
D12 TH56
International Tel: +44 (0)1942 433343

www.ansell-lighting.com

Spain Tel: 00 34 938 005642

Issue Number: [2]